

Part no. AL-2126-52551




12-80 V, red/green, pipe mount

Specifications

| | |
|--------------------------------------|------------|
| Voltage range (V), nominal | 12-80 |
| Voltage range (V), functional | 12-80 |
| Power consumption (W) | 2,14-5,44 |
| Load capacity | |
| Temperature range (°C) | -40 bis 65 |
| Brightness | |
| Brightness (raw lm) | |
| Brightness (effective lm) | |
| Brightness (cd) | |
| Brightness (lx) | |
| Performance class | |
| Beam pattern/lens | |
| Beam angle [°] | |
| Colour Temperature (K) | |
| Others | |
| Ingress protection | |
| Resistivity | |

Part no. AL-2126-52551

Dimensions

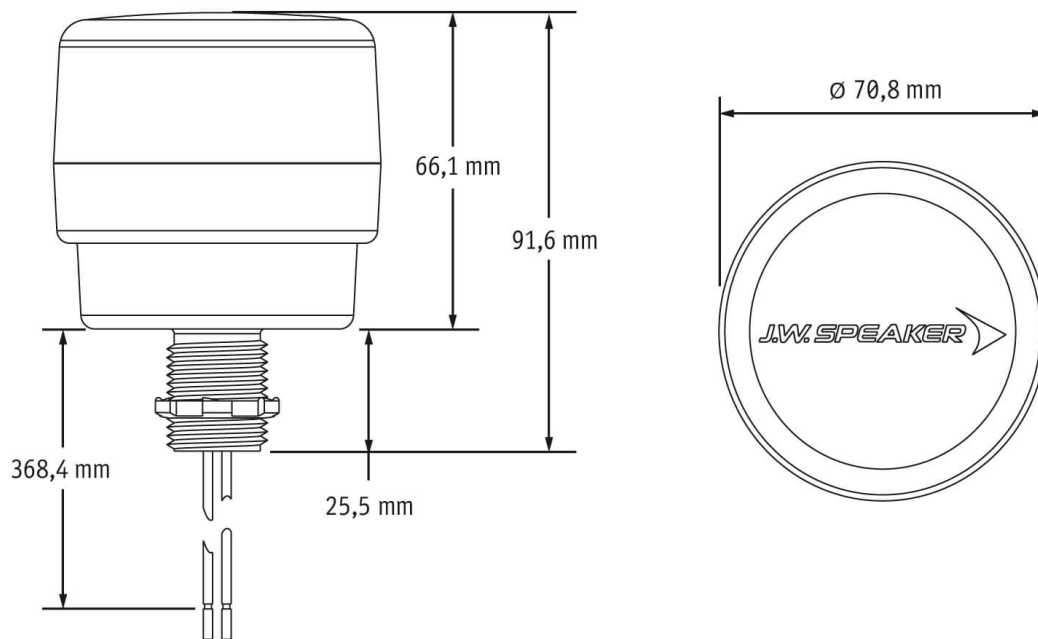

Mounting

| | |
|--|------------------------|
| Mounting type | Rohrmontage (1/2" NPT) |
| Installation dimensions/diameter [mm] | |
| Installation depth [mm] | |
| Connector | Kabel |
| Mating connector | |
| Reverse polarity protection | 1 |
| Black wire | Masse |
| Red wire | Rote LED |
| White wire | Grüne LED |

Part no. AL-2126-52551

Others

| | |
|---------------------------|--------------|
| Material (Housing) | Polycarbonat |
| Material (Diffusing lens) | Acryl |
| Color (Housing) | Schwarz |
| Color (Mount) | |
| Color (Diffusing lens) | Weiß |

Variants

| | |
|---------------|---------------------------------|
| AL-2095-53551 | 12-80 V, rot/grün, Flachmontage |
| AL-2126-52551 | 12-80 V, rot/grün, Rohrmontage |

Accessories

| | |
|---------------|--|
| AL-2095-53551 | Signalleuchte Modell 538/539 12-80 V, rot/grün, Flachmontage |
|---------------|--|