


**Part no. AL-560-41224**

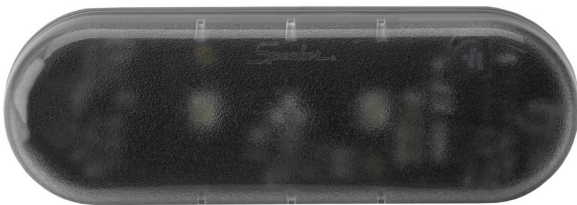


12-48 V, white, compartment light

## Specifications

<b>Voltage range (V), nominal</b>	12-48
<b>Voltage range (V), functional</b>	
<b>Power consumption (W)</b>	6
<b>Load capacity</b>	
<b>Temperature range (°C)</b>	-40 bis 65
<b>Brightness</b>	
<b>Brightness (raw lm)</b>	
<b>Brightness (effective lm)</b>	
<b>Brightness (cd)</b>	
<b>Brightness (lx)</b>	
<b>Performance class</b>	
<b>Beam pattern/lens</b>	
<b>Beam angle [°]</b>	
<b>Colour Temperature (K)</b>	
<b>Others</b>	
<b>Ingress protection</b>	IP67
<b>Resistivity</b>	

## Dimensions

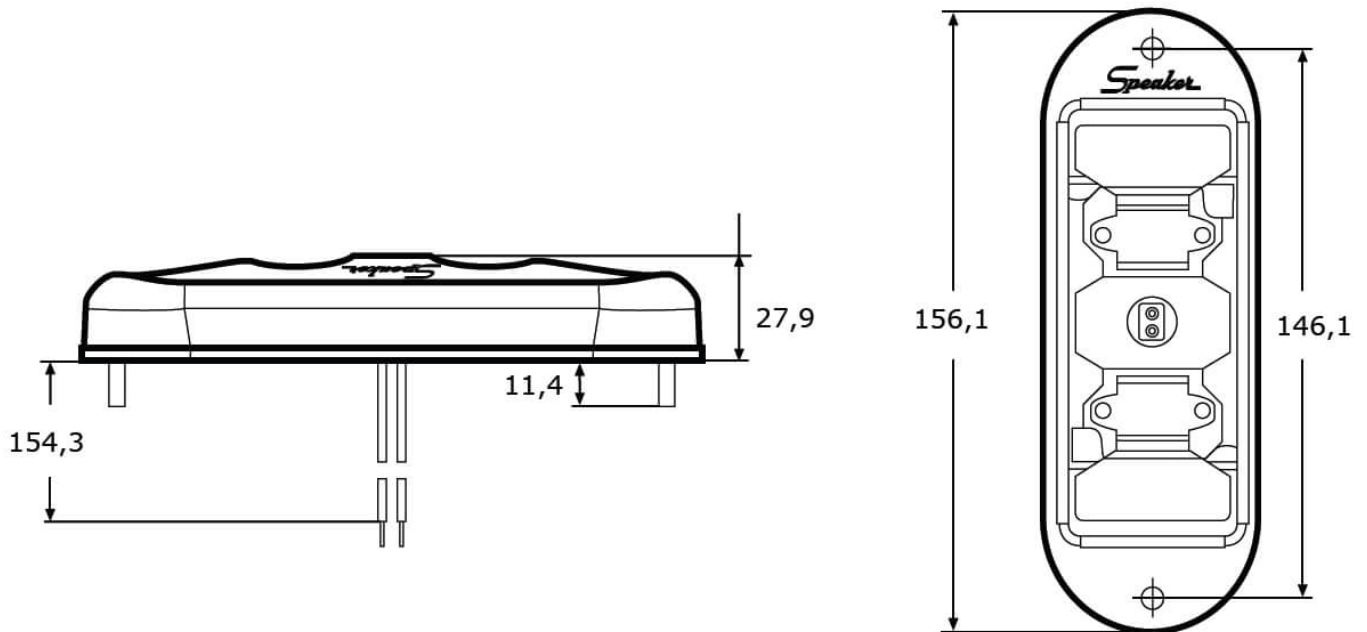

## Mounting

Mounting type	Flachmontage, M4-0,7x16 (2x)
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Kabel
Mating connector	
Reverse polarity protection	1

**Part no. AL-560-41224**

## Others

Material (Housing)	Polycarbonat
Material (Diffusing lens)	Polycarbonat
Color (Housing)	
Color (Mount)	Schwarz
Color (Diffusing lens)	Klar

## Variants

AL-560-41224	12-48 V, weiß, Kabinenbeleuchtung
AL-861-41201	12-48 V, weiß, Kabinenbeleuchtung, Berührungsschalter

## Accessories