

**Part no. AL-561-28224**




12-24 V, white, frosted glass

## Specifications

<b>Voltage range (V), nominal</b>	12-24
<b>Voltage range (V), functional</b>	
<b>Power consumption (W)</b>	
<b>Load capacity</b>	
<b>Temperature range (°C)</b>	-40 to 65
<b>Brightness</b>	
<b>Brightness (raw lm)</b>	
<b>Brightness (effective lm)</b>	
<b>Brightness (cd)</b>	
<b>Brightness (lx)</b>	
<b>Performance class</b>	
<b>Beam pattern/lens</b>	Innenraumbeleuchtung
<b>Beam angle [°]</b>	
<b>Colour Temperature (K)</b>	
<b>Others</b>	
<b>Ingress protection</b>	IP66
<b>Resistivity</b>	
<b>Standards</b>	
<b>Electromagnetic Compatibility</b>	
<b>Transient spike protection</b>	

## Dimensions

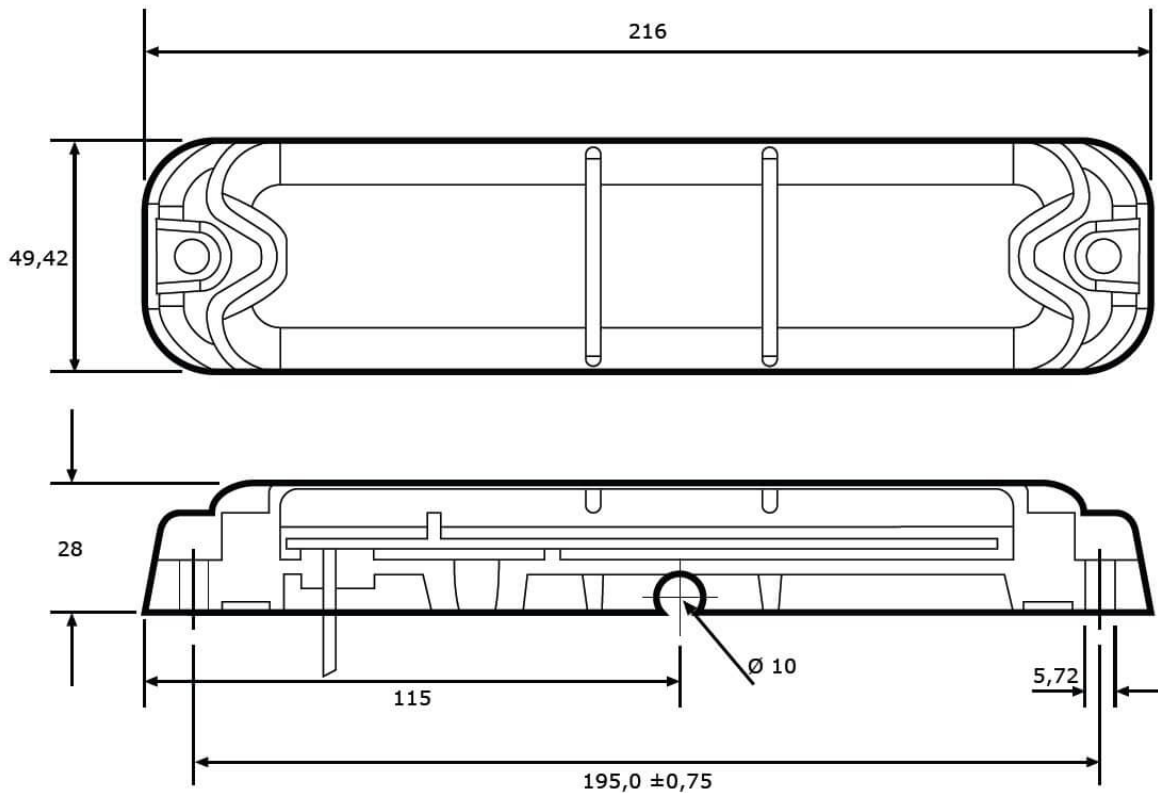

## Mounting

Mounting type	Flat mount (with cable entry)
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Bare wire leads
Mating connector	
Reverse polarity protection	1
Black wire	Masse
Red wire	Innenleuchte

**Part no. AL-561-28224**

## Others

Material (Housing)	ABS-Kunststoff
Material (Diffusing lens)	Acryl
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Weiß

## Beam pattern

## Variants

AL-561-28224	12-24 V, weiß, Milchglas
--------------	--------------------------

## Accessories