

Part no. AL-561-28224




12-24 V, white, frosted glass

Specifications

| | |
|--------------------------------------|----------------------|
| Voltage range (V), nominal | 12-24 |
| Voltage range (V), functional | |
| Power consumption (W) | |
| Load capacity | |
| Temperature range (°C) | -40 bis 65 |
| Brightness | |
| Brightness (raw lm) | |
| Brightness (effective lm) | |
| Brightness (cd) | |
| Brightness (lx) | |
| Performance class | |
| Beam pattern/lens | Innenraumbeleuchtung |
| Beam angle [°] | |
| Colour Temperature (K) | |
| Others | |
| Ingress protection | IP66 |
| Resistivity | |
| Standards | |
| Electromagnetic Compatibility | |
| Transient spike protection | |

Dimensions

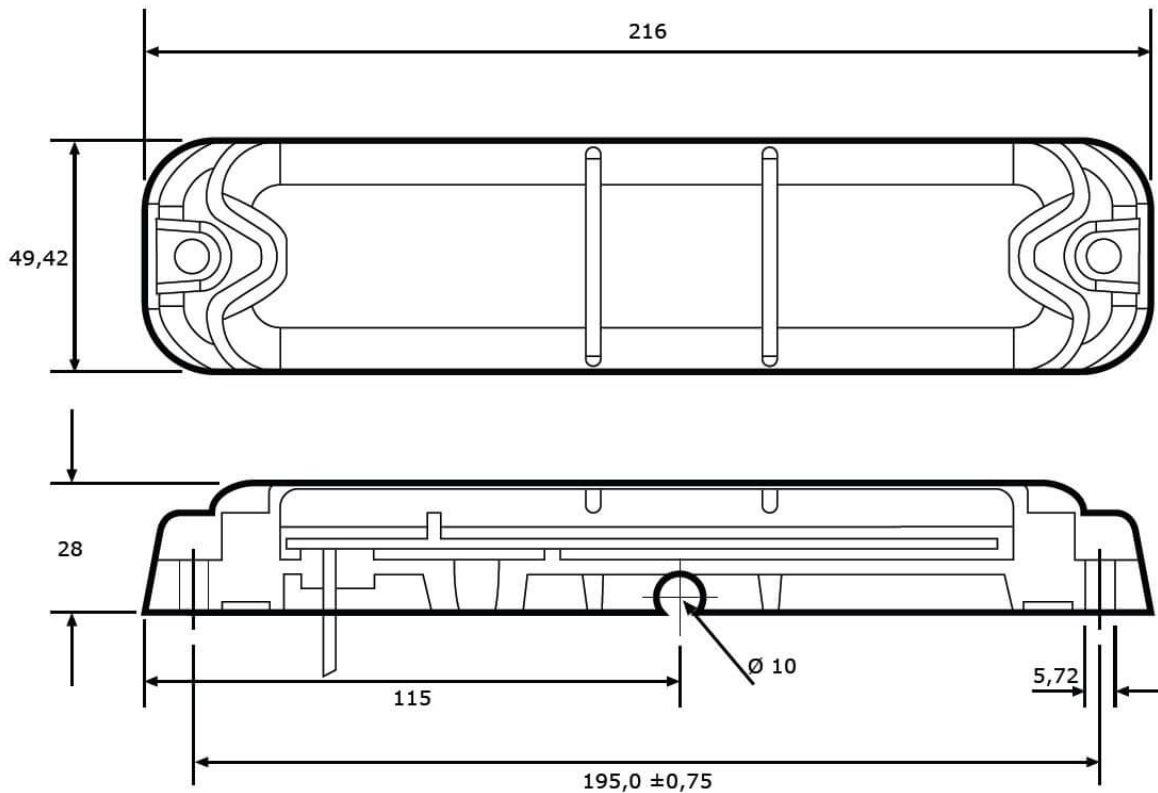

Mounting

| | |
|---------------------------------------|--------------------------------------|
| Mounting type | Flachmontage (mit Kabeldurchführung) |
| Installation dimensions/diameter [mm] | |
| Installation depth [mm] | |
| Connector | Kabel |
| Mating connector | |
| Reverse polarity protection | 1 |
| Black wire | Masse |
| Red wire | Innenleuchte |

Part no. AL-561-28224

Others

| | |
|---------------------------|----------------|
| Material (Housing) | ABS-Kunststoff |
| Material (Diffusing lens) | Acryl |
| Color (Housing) | Schwarz |
| Color (Mount) | |
| Color (Diffusing lens) | Weiß |

Beam pattern

Variants

| | |
|--------------|--------------------------|
| AL-561-28224 | 12-24 V, weiß, Milchglas |
|--------------|--------------------------|

Accessories