

LED-Einbau-Arbeitsscheinwerfer Modell 518

Part no. AS-1454-51111



12-24 V (9-32 V), 1,000 lm, flood


Specifications

Voltage range (V), nominal	12-24
Voltage range (V), functional	9-32
Power consumption (W)	19,2
Load capacity	
Temperature range (°C)	-40 bis 65
Brightness	
Brightness (raw lm)	
Brightness (effective lm)	1000
Brightness (cd)	
Brightness (lx)	
Performance class	bis 1000 lm eff.
Beam pattern/lens	Geländeausleuchtung
Beam angle [°]	
Colour Temperature (K)	5000
Others	
Ingress protection	IP69
Resistivity	

LED-Einbau-Arbeitsscheinwerfer Modell 518

Part no. AS-1454-51111

Dimensions

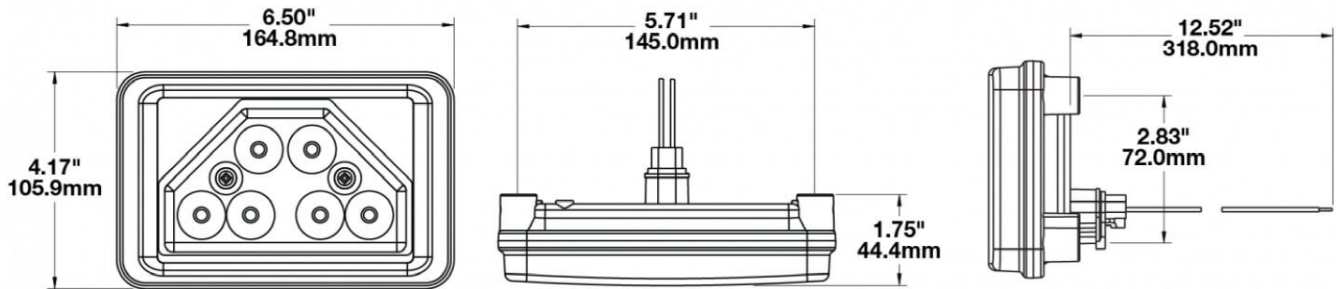

Mounting

Mounting type	Einbau
Installation dimensions/diameter [mm]	105,9x164,8
Installation depth [mm]	
Connector	Deutsch-Stecker (DT04-2P)
Mating connector	Deutsch-Stecker (DT06-2S)
Reverse polarity protection	1
Black wire	Masse
Red wire	Arbeitsscheinwerfer

LED-Einbau-Arbeitsscheinwerfer Modell 518

Part no. AS-1454-51111

Others

Material (Housing)	Polycarbonat
Material (Diffusing lens)	Polycarbonat
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Weiß

Variants

AS-1454-51111	12-24 V (9-32 V), 1.000 lm, Geländeausleuchtung
AS-1455-51121	12-24 V (9-32 V), 1.000 lm, Nahfeldausleuchtung
AS-1456-21122	12-24 V (9-32 V), 1.000 lm, Nahfeldausleuchtung, mit Anti-Schock-Einbaurahmen

Accessories