

Part no. AS-1788-44111




12 V, 1300 lm, flood

Specifications

Voltage range (V), nominal	12
Voltage range (V), functional	9-16
Power consumption (W)	19,7-15,3
Load capacity	
Temperature range (°C)	-40 bis 85
Brightness	
Brightness (raw lm)	2450
Brightness (effective lm)	1300
Brightness (cd)	
Brightness (lx)	
Performance class	1000 bis 3000 lm eff.
Beam pattern/lens	
Beam angle [°]	
Colour Temperature (K)	5000
Others	
Ingress protection	
Resistivity	

Part no. AS-1788-44111

Dimensions

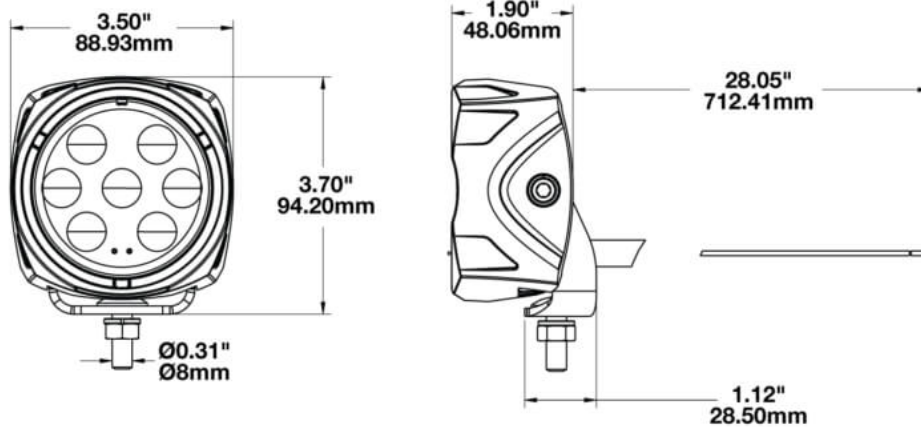

Mounting

Mounting type	Universalhalterung, M8-1,25x25
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Kabel
Mating connector	
Reverse polarity protection	1
Black wire	Masse
Red wire	Arbeitsscheinwerfer

Part no. AS-1788-44111

Others

Material (Housing)	Aluminium
Material (Diffusing lens)	Polycarbonat
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Klar

Variants

AS-1788-44111	12 V, 1300 lm, Geländeausleuchtung
AS-1817-44112	12 V, Nahfeldausleuchtung
AS-1818-44113	12 V, Spot

Accessories