

Part no. AS-2099-00351



BOBCAT RIGHT HAND HEADLIGHT


BOBCAT LEFT HAND HEADLIGHT

12-24 V, 2-light-kit (left and right)

Specifications

Voltage range (V), nominal	12-24
Voltage range (V), functional	9-32
Power consumption (W)	26,4
Load capacity	
Temperature range (°C)	-40 bis 65
Brightness	
Brightness (raw lm)	
Brightness (effective lm)	1000
Brightness (cd)	
Brightness (lx)	
Performance class	bis 1000 lm eff.
Beam pattern/lens	
Beam angle [°]	
Colour Temperature (K)	
Others	
Ingress protection	IP68
Resistivity	
Standards	
Electromagnetic Compatibility	
Transient spike protection	

Dimensions

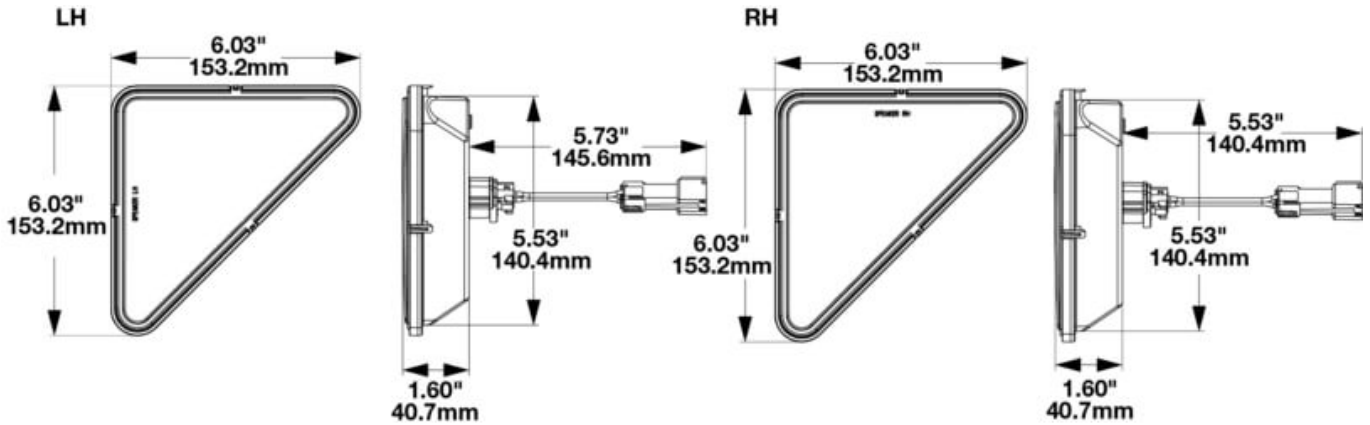

Mounting

Mounting type	Einbau
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Deutsch-Stecker (DT04-2P)
Mating connector	Deutsch-Stecker (DT06-2S)
Reverse polarity protection	1
Black wire	Masse
Red wire	Arbeitsscheinwerfer

Part no. AS-2099-00351

Others

Material (Housing)	Polycarbonat
Material (Diffusing lens)	Polycarbonat
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Klar

Beam pattern

Variants

AS-2099-00351	12-24 V, Set aus 2 Leuchten (links und rechts)
---------------	--

Accessories