

**Part no. AS-2187-00351**




12 V, 2-light-kit (left and right)

## Specifications

<b>Voltage range (V), nominal</b>	12
<b>Voltage range (V), functional</b>	10-16
<b>Power consumption (W)</b>	18
<b>Load capacity</b>	
<b>Temperature range (°C)</b>	-40 bis 65
<b>Brightness</b>	
<b>Brightness (raw lm)</b>	1728
<b>Brightness (effective lm)</b>	1050
<b>Brightness (cd)</b>	
<b>Brightness (lx)</b>	
<b>Performance class</b>	1000 bis 3000 lm eff.
<b>Beam pattern/lens</b>	
<b>Beam angle [°]</b>	
<b>Colour Temperature (K)</b>	5000
<b>Others</b>	
<b>Ingress protection</b>	IP67
<b>Resistivity</b>	
<b>Standards</b>	
<b>Electromagnetic Compatibility</b>	
<b>Transient spike protection</b>	150 V @ 1 Hz-100 Pulse

Part no. AS-2187-00351

## Dimensions

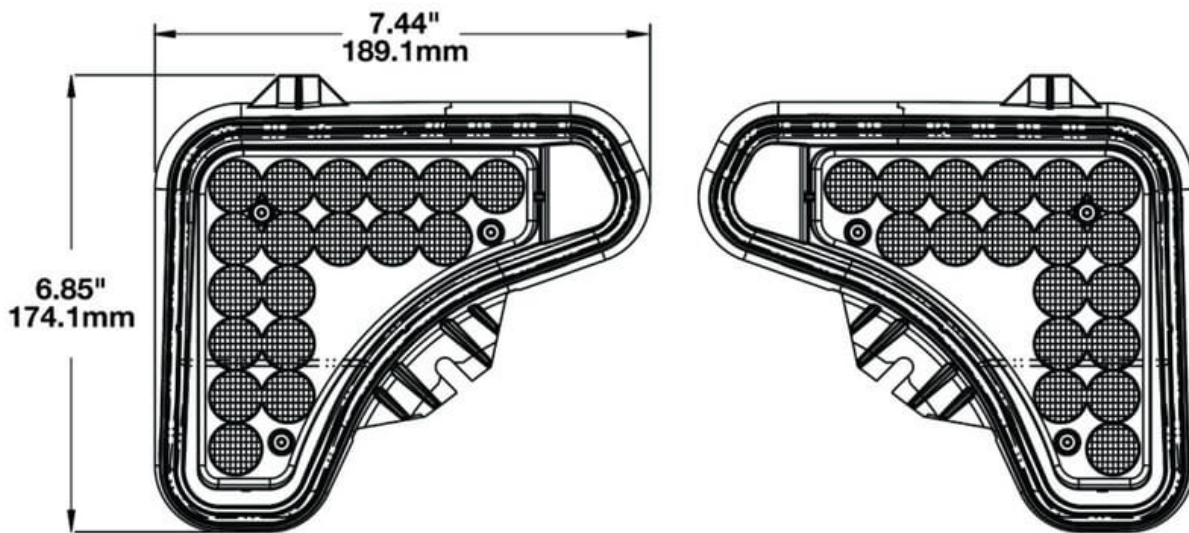

## Mounting

Mounting type	Einbau
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	
Mating connector	PE 12124819
Reverse polarity protection	1

# LED-Arbeits- und Fahrlicht für Bobcat Gen 5

---

**Part no. AS-2187-00351**

## Others

<b>Material (Housing)</b>	Nylon
<b>Material (Diffusing lens)</b>	Polycarbonat
<b>Color (Housing)</b>	Schwarz
<b>Color (Mount)</b>	
<b>Color (Diffusing lens)</b>	Klar

## Beam pattern

## Variants

<b>AS-2187-00351</b>	12 V, Set aus 2 Leuchten (links und rechts)
----------------------	---

## Accessories