

**Part no. AS-2268-79141**




12-24 V, flood, with turn signal

## Specifications

<b>Voltage range (V), nominal</b>	12-24
<b>Voltage range (V), functional</b>	9-30
<b>Power consumption (W)</b>	26,8-27,6 (flood), 2,28-4,8 (turn)
<b>Load capacity</b>	
<b>Temperature range (°C)</b>	-40 to 65
<b>Brightness</b>	
<b>Brightness (raw lm)</b>	3540
<b>Brightness (effective lm)</b>	1980
<b>Brightness (cd)</b>	3300
<b>Brightness (lx)</b>	
<b>Performance class</b>	1000 to 3000 lm eff.
<b>Beam pattern/lens</b>	Geländeausleuchtung
<b>Beam angle [°]</b>	
<b>Colour Temperature (K)</b>	5050
<b>Others</b>	
<b>Ingress protection</b>	IP67 & IP69K
<b>Resistivity</b>	
<b>Standards</b>	ECE (Reg. 148-1), CE
<b>Electromagnetic Compatibility</b>	ECE (Reg. 10)
<b>Transient spike protection</b>	

Part no. AS-2268-79141

## Dimensions

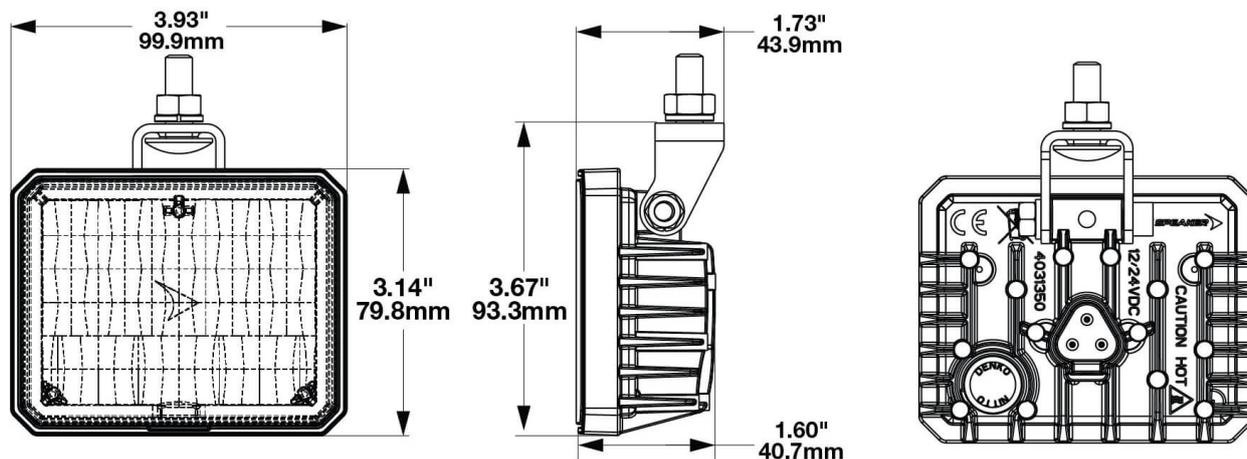

## Mounting

Mounting type	Universal mount, M8
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Deutsch plug (DT04-3P)
Mating connector	Deutsch plug (DT06-3S)
Reverse polarity protection	1

**Part no. AS-2268-79141**

## Others

Material (Housing)	Aluminium
Material (Diffusing lens)	Polycarbonat
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Klar

## Beam pattern

## Variants

AS-2268-79141	12-24 V, Geländeausleuchtung, mit Blinker
---------------	-------------------------------------------

## Accessories