

Part no. AS-2348-89111


12-24 V, flood



Specifications

Voltage range (V), nominal	12-24
Voltage range (V), functional	9-30
Power consumption (W)	108-96
Load capacity	
Temperature range (°C)	-40 to 85
Brightness	
Brightness (raw lm)	14000
Brightness (effective lm)	7750
Brightness (cd)	17450
Brightness (lx)	
Performance class	
Beam pattern/lens	
Beam angle [°]	
Colour Temperature (K)	5055
Others	
Ingress protection	IP67 & IP69K
Resistivity	
Standards	CE
Electromagnetic Compatibility	
Transient spike protection	

Dimensions

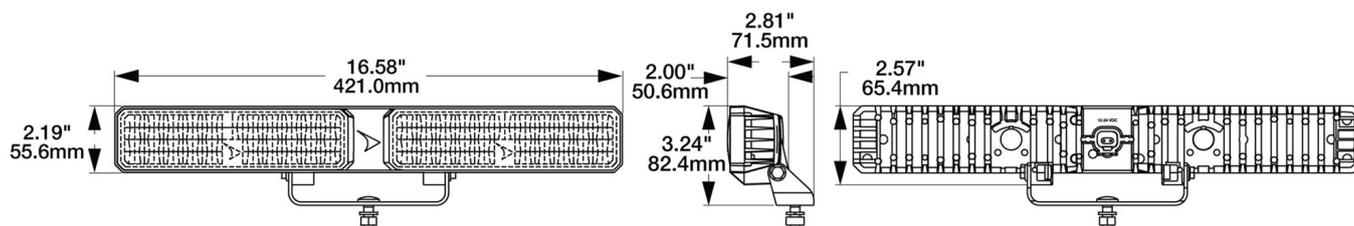

Mounting

Mounting type	Universal mount, 5/16"
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Deutsch plug (DT04-2P)
Mating connector	Deutsch plug (DT06-2S)
Reverse polarity protection	1
Black wire	Masse
Red wire	Arbeitsscheinwerfer

Part no. AS-2348-89111

Others

Material (Housing)	Aluminium
Material (Diffusing lens)	Polycarbonat
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Klar

Beam pattern

Variants

AS-2348-89111	12-24 V, Geländeausleuchtung
---------------	------------------------------

Accessories

AS-2113-79111	Modell 792 12-24 V, Geländeausleuchtung, Einbau
AS-2093-79111	Modell 792 12-24 V, Geländeausleuchtung, Aufbau
AS-2172-89111	Modell 892 12-24 V, Geländeausleuchtung
AS-2185-89111	Modell 893 12-24 V, breite Geländeausleuchtung
AS-2268-79141	Modell 795 12-24 V, Geländeausleuchtung, mit Blinker