

Part no. BL-1738-53517




12-80 V, blue, pipe mount

Specifications

Voltage range (V), nominal	12-80
Voltage range (V), functional	
Power consumption (W)	3.07-6.08
Load capacity	
Temperature range (°C)	-40 to 65
Brightness	SAE Cl. III
Brightness (raw lm)	
Brightness (effective lm)	
Brightness (cd)	
Brightness (lx)	
Performance class	
Beam pattern/lens	
Beam angle [°]	
Colour Temperature (K)	
Others	
Ingress protection	
Resistivity	

Dimensions

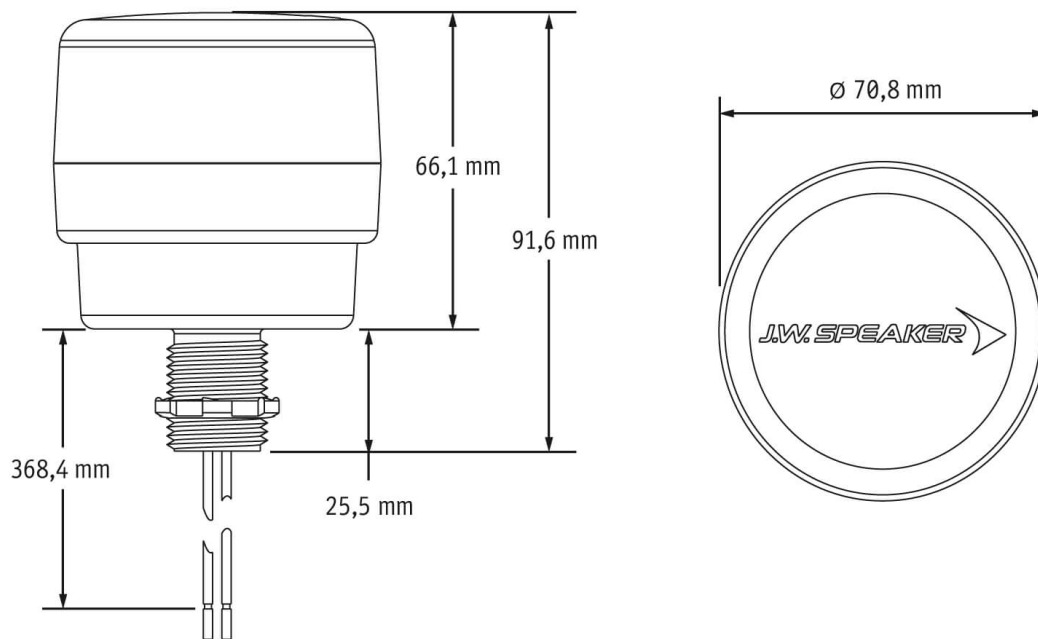

Mounting

Mounting type	Pipe mount
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Bare wire leads
Mating connector	
Reverse polarity protection	1
Black wire	Masse
Red wire	Blitzleuchte

Part no. BL-1738-53517

Others

Material (Housing)	Polycarbonat
Material (Diffusing lens)	Acryl
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Klar

Variants

BL-1664-53511	12-80 V, orange, Rohrmontage
BL-1734-53513	12-80 V, rot, Rohrmontage
BL-1736-53515	12-80 V, grün, Rohrmontage
BL-1738-53517	12-80 V, blau, Rohrmontage
BL-1740-53519	12-80 V, weiß, Rohrmontage

Accessories