

Part no. BL-1739-53518




12-80 V, blue, roof mount

Specifications

Voltage range (V), nominal	12-80
Voltage range (V), functional	
Power consumption (W)	3.07-6.08
Load capacity	
Temperature range (°C)	-40 to 65
Brightness	SAE Cl. III
Brightness (raw lm)	
Brightness (effective lm)	
Brightness (cd)	
Brightness (lx)	
Performance class	
Beam pattern/lens	
Beam angle [°]	
Colour Temperature (K)	
Others	
Ingress protection	
Resistivity	

Dimensions

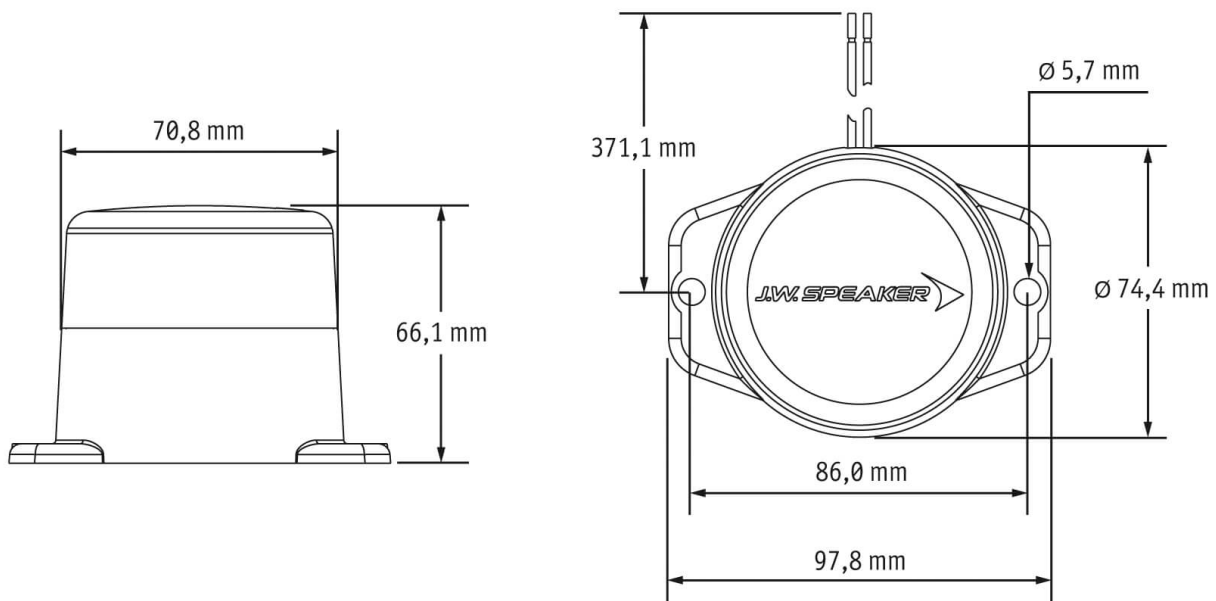

Mounting

Mounting type	Flat mount (with cable entry)
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Bare wire leads
Mating connector	
Reverse polarity protection	1
Black wire	Masse
Red wire	Blitzleuchte

Part no. BL-1739-53518

Others

Material (Housing)	Polycarbonat
Material (Diffusing lens)	Acryl
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Klar

Variants

BL-1665-53512	12-80 V, orange, Dachmontage
BL-1735-53514	12-80 V, rot, Dachmontage
BL-1737-53516	12-80 V, grün, Dachmontage
BL-1739-53518	12-80 V, blau, Dachmontage
BL-1741-53510	12-80 V, weiß, Dachmontage

Accessories