

Part no. **BL-1813-35521**




12-24 V, blue

## Specifications

Voltage range (V), nominal	12-24
Voltage range (V), functional	
Power consumption (W)	
Load capacity	0.75
Temperature range (°C)	-30 bis 50
Brightness	SAE Kl. I
Brightness (raw lm)	
Brightness (effective lm)	
Brightness (cd)	
Brightness (lx)	
Performance class	
Beam pattern/lens	
Beam angle [°]	
Colour Temperature (K)	
Others	
Ingress protection	
Resistivity	

## Dimensions

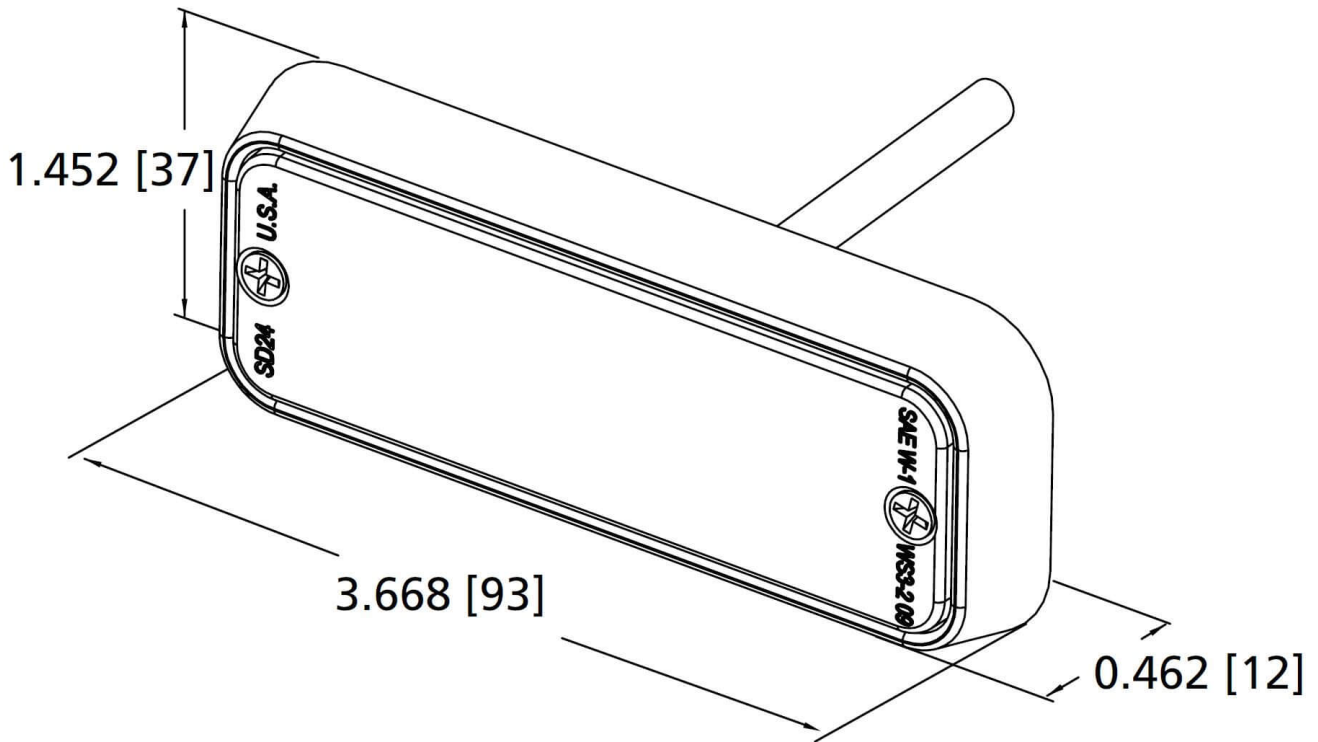

## Mounting

Mounting type	Flachmontage
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Kabel
Mating connector	
Reverse polarity protection	1

**Part no. BL-1813-35521**

## Others

Material (Housing)	
Material (Diffusing lens)	
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Klar

## Variants

BL-1812-35520	12-24 V, orange
BL-1813-35521	12-24 V, blau
BL-1815-35523	12-24 V, rot
BL-1816-35524	12-24 V, weiß

## Accessories