LED-Eckmodul-Blitzleuchte ED5100

Part no. BL-1834-51522

12-24 V, blue

Specifications

Voltage range (V), nominal	12-24
Voltage range (V), functional	10-30
Power consumption (W)	2.4
Load capacity	
Temperature range (°C)	-40 to 65
Brightness	
Brightness (raw lm)	
Brightness (effective lm)	
Brightness (cd)	
Brightness (lx)	
Performance class	
Beam pattern/lens	
Beam angle [°]	
Colour Temperature (K)	
Others	7 different strobe pattern
Ingress protection	IP67
Resistivity	

Bei der Pulvermühle 7a | 22453 Hamburg
+49 40 303300-0 | info@jfuehr.com | www.jfuehr.com

J. FÜHR

Part no. BL-1834-51522

Dimensions

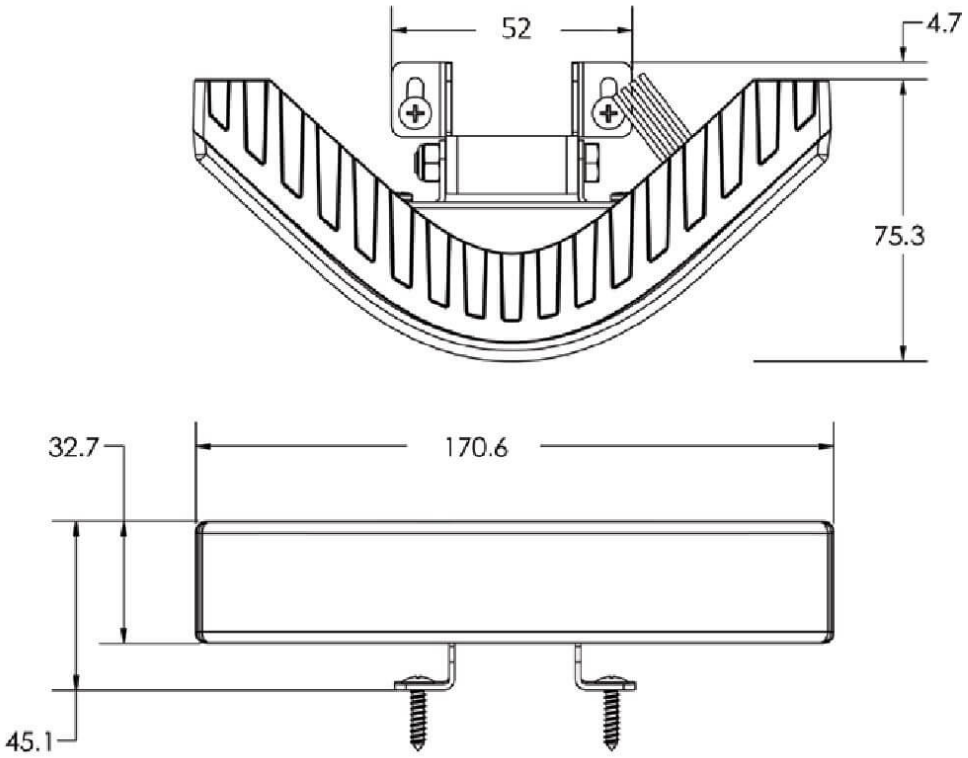

Mounting

Mounting type	Spec. mounting bracket
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Bare wire leads
Mating connector	
Reverse polarity protection	1
Black wire	Masse
Red wire	Blitzleuchte
Yellow wire	Synchronisierung
Blue wire	Moduswahl

Bei der Pulvermühle 7a | 22453 Hamburg
+49 40 303300-0 | info@jfuehr.com | www.jfuehr.com

Part no. BL-1834-51522

Others

Material (Housing)	Aluminium
Material (Diffusing lens)	Polycarbonat
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Klar

Variants

BL-1834-51522	12-24 V, blau
BL-1835-51523	12-24 V, rot

Accessories

Bei der Pulvermühle 7a | 22453 Hamburg
+49 40 303300-0 | info@jfuehr.com | www.jfuehr.com

J.FÜHR