

Part no. **BL-1834-51522**




12-24 V, blue

Specifications

Voltage range (V), nominal	12-24
Voltage range (V), functional	10-30
Power consumption (W)	2,4
Load capacity	
Temperature range (°C)	-40 bis 65
Brightness	
Brightness (raw lm)	
Brightness (effective lm)	
Brightness (cd)	
Brightness (lx)	
Performance class	
Beam pattern/lens	
Beam angle [°]	
Colour Temperature (K)	
Others	7 verschiedene Blitzmuster
Ingress protection	IP67
Resistivity	

Dimensions

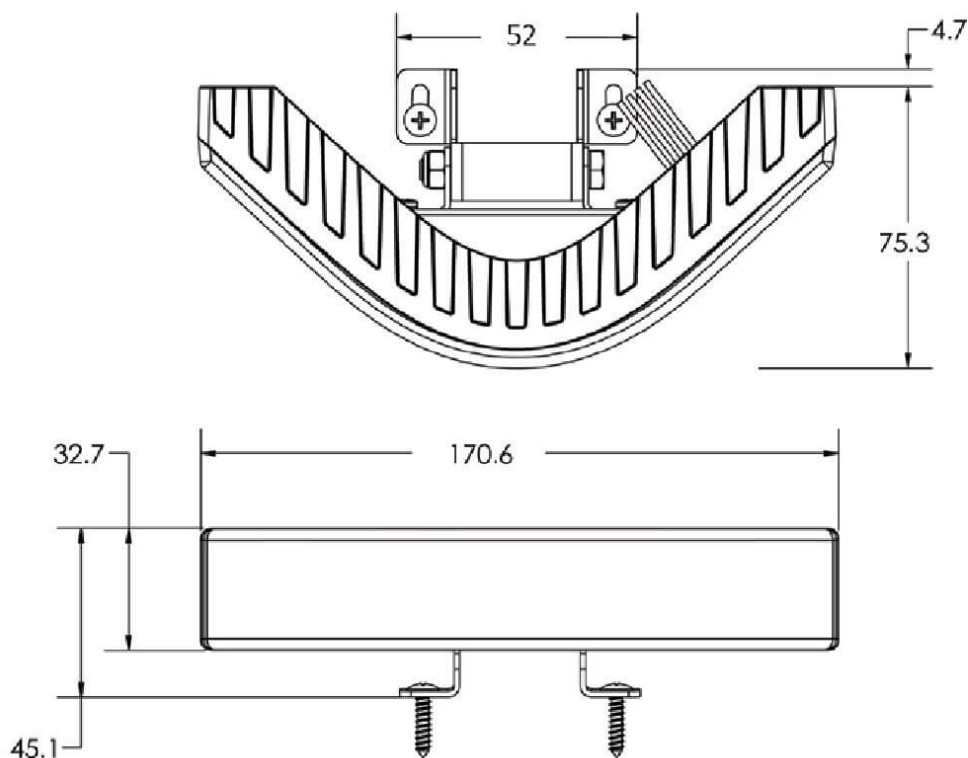

Mounting

Mounting type	Spez. Montagehalter
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Kabel
Mating connector	
Reverse polarity protection	1
Black wire	Masse
Red wire	Blitzleuchte
Yellow wire	Synchronisierung
Blue wire	Moduswahl

Part no. BL-1834-51522

Others

Material (Housing)	Aluminium
Material (Diffusing lens)	Polycarbonat
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Klar

Variants

BL-1834-51522	12-24 V, blau
BL-1835-51523	12-24 V, rot

Accessories