


Part no. BL-1841-50521

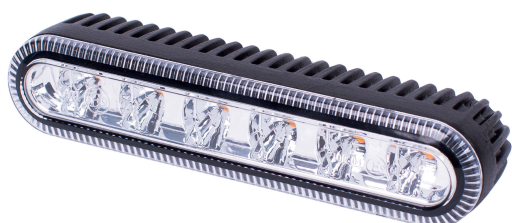


12-24 V, blue, ECE road approval (Reg. 65)

Specifications

Voltage range (V), nominal	12-24
Voltage range (V), functional	
Power consumption (W)	18
Load capacity	0,75
Temperature range (°C)	-40 bis 65
Brightness	
Brightness (raw lm)	
Brightness (effective lm)	
Brightness (cd)	
Brightness (lx)	
Performance class	
Beam pattern/lens	
Beam angle [°]	
Colour Temperature (K)	
Others	10. verschiedene Blitzmuster
Ingress protection	IP67
Resistivity	

Part no. **BL-1841-50521**

Dimensions

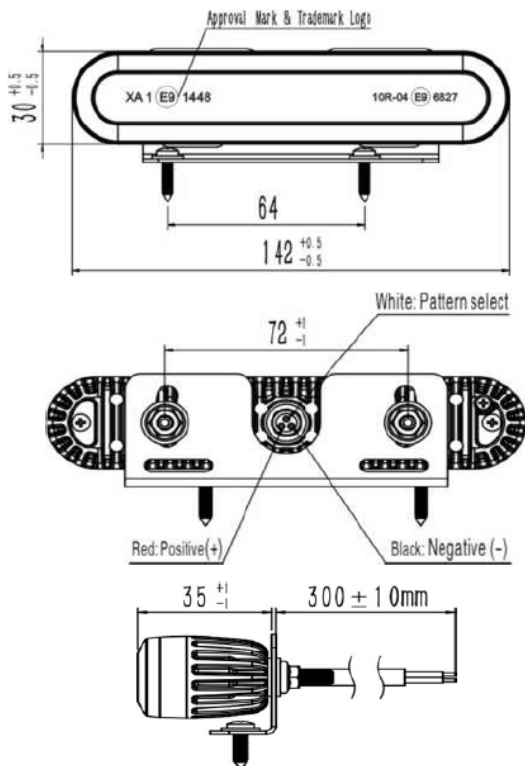

Mounting

Mounting type

Flachmontage

Installation dimensions/diameter [mm]

Installation depth [mm]

Connector

Kabel

Mating connector

Reverse polarity protection

1

Part no. BL-1841-50521

Others

Material (Housing)	Aluminium
Material (Diffusing lens)	Polycarbonat
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Klar

Variants

BL-1840-50520	12-24 V, orange, ECE-Straßenzulassung (Reg. 65)
BL-1841-50521	12-24 V, blau, ECE-Straßenzulassung (Reg. 65)
BL-1842-50522	12-24 V, weiß
BL-1843-50523	12-24 V, rot

Accessories