

Part no. **BL-365-10801**


10-48 V, amber



## Specifications

Voltage range (V), nominal	10-48
Voltage range (V), functional	
Power consumption (W)	
Load capacity	
Temperature range (°C)	
Brightness	
Brightness (raw lm)	
Brightness (effective lm)	
Brightness (cd)	
Brightness (lx)	
Performance class	
Beam pattern/lens	
Beam angle [°]	
Colour Temperature (K)	
Frequency, revolutions (Hz, rpm, fpm)	75 fpm (Doppelblitz)
Others	
Ingress protection	
Resistivity	
Standards	
Electromagnetic Compatibility	ja
Transient spike protection	

## Dimensions

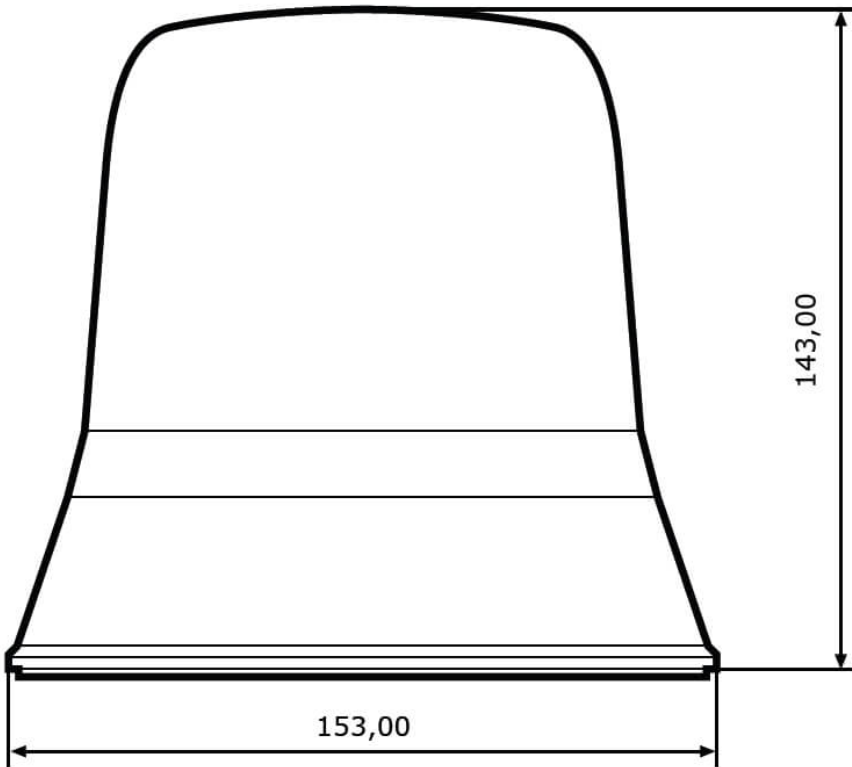

## Mounting

Mounting type	Dachmontage (3 Schrauben)
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Kabel
Mating connector	
Reverse polarity protection	0
Socket	

**Part no. BL-365-10801**

## Others

Material (Housing)	
Material (Diffusing lens)	
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	

## Beam pattern

## Variants

BL-365-10801	10-48 V, orange
--------------	-----------------

## Accessories