

LED-Blitzleuchte Mini Vision

Part no. BL-382-6626




12-80 V, amber, roof mounting, wire outlet on the side

Specifications

Voltage range (V), nominal	12-80
Voltage range (V), functional	9-86
Power consumption (W)	6
Load capacity	
Temperature range (°C)	-30 bis 50
Brightness	SAE Kl. III
Brightness (raw lm)	
Brightness (effective lm)	
Brightness (cd)	
Brightness (lx)	
Performance class	
Beam pattern/lens	
Beam angle [°]	
Colour Temperature (K)	
Frequency, revolutions (Hz, rpm, fpm)	75±5 fpm
Others	
Ingress protection	IP67
Resistivity	
Standards	UKCA
Electromagnetic Compatibility	
Transient spike protection	

Dimensions

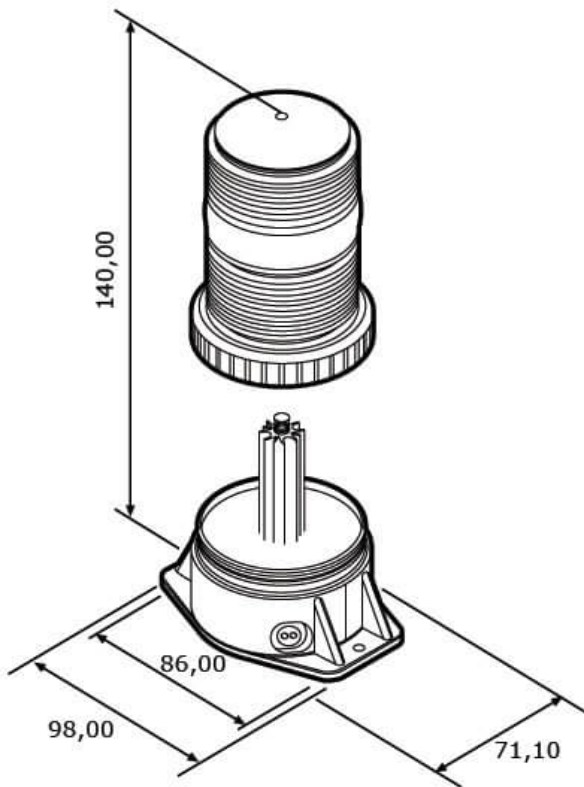

Mounting

Mounting type	Dachmontage, 2 Schrauben
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Kabel
Mating connector	
Reverse polarity protection	0
Socket	
Black wire	Masse
Red wire	Blitzleuchte

Part no. BL-382-66260

Others

Material (Housing)	Nylon
Material (Diffusing lens)	Polycarbonat
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Orange

Beam pattern

Variants

BL-382-66260	12-80 V, orange, Dachmontage, Kabelausgang seitlich
---------------------	---

Accessories

BL-231-00012	Schutzkorb Mini Vision für Blitzleuchte Mini Vision, Metall
---------------------	---