

Part no. FS-1753-8735




12 V, high and low beam, front position light,
ECE road approval (Reg. 50, 113)

Specifications

Voltage range (V), nominal	12
Voltage range (V), functional	9-16
Power consumption (W)	20 (Abblendl.), 32 (Fernl.), 1,6 (Standl.)
Load capacity	
Temperature range (°C)	
Brightness	
Brightness (raw lm)	925 (Abblendl.), 1620 (Fernl.)
Brightness (effective lm)	500 (Abblendl.), 850 (Fernl.)
Brightness (cd)	12110 (Abblendl.), 41000 (Fernl.)
Brightness (lx)	
Performance class	
Beam pattern/lens	Abblend- und Fernlicht, Standlicht
Beam angle [°]	
Colour Temperature (K)	5000
Others	
Ingress protection	IP67
Resistivity	

Dimensions

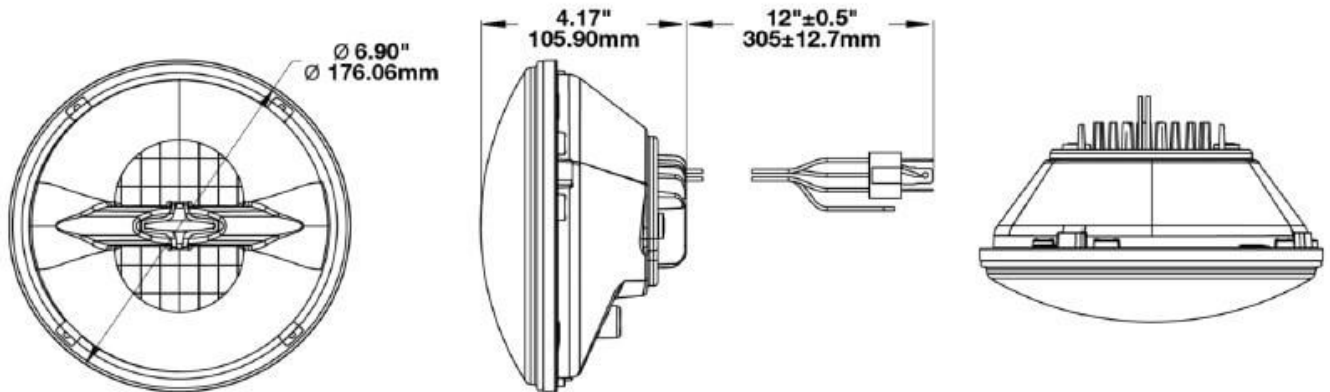

Mounting

Mounting type	Einbau
Installation dimensions/diameter [mm]	176,06
Installation depth [mm]	
Connector	H4-Stecker
Mating connector	H4 (AMP 172515-2)
Reverse polarity protection	1
Black wire	Masse
Red wire	Standlicht
Yellow wire	Abblendlicht
White wire	Fernlicht

Part no. FS-1753-87350

Others

Material (Housing)	Aluminium
Material (Diffusing lens)	Polycarbonat
Color (Housing)	Schwarz
Color (Mount)	Chrom
Color (Diffusing lens)	Klar

Variants

FS-1753-87350	12 V, Abblend- und Fernlicht, Standlicht, ECE-Straßenzulassung (Reg. 50, 113)
FS-1919-87351	12 V, Abblend- und Fernlicht, Standlicht, ECE-Straßenzulassung (Reg. 50, 113), Dark Chrome

Accessories