

Part no. FS-1850-98341




12-24 V, low and high beam, daytime running light, with front position, with turn signal, ECE road approval (Reg. 6, 7, 112), 2 light kit (left and right), LHT

Specifications

Voltage range (V), nominal	12-24
Voltage range (V), functional	10-32
Power consumption (W)	28.8-32.4 (low), 38.4-40.8 (high), 6.48-10.2 (turn), 0.48-0.72 (position)
Load capacity	
Temperature range (°C)	
Brightness	
Brightness (raw lm)	2115 (Abblendl.), 2835 (Fernl.)
Brightness (effective lm)	785 (Abblendl.), 1135 (Fernl.)
Brightness (cd)	52000
Brightness (lx)	
Brightness (reference index)	
Performance class	
Beam pattern/lens	Abblend- und Fernlicht, Tagfahrlicht, Fahrtrichtungsanzeiger
Beam angle [°]	
Colour Temperature (K)	
Others	
Ingress protection	IP67
Resistivity	
Standards	ECE (Reg. 6, 7, 87, 112)
Electromagnetic Compatibility	ECE (Reg. 10)
Transient spike protection	

Part no. FS-1850-98341

Dimensions

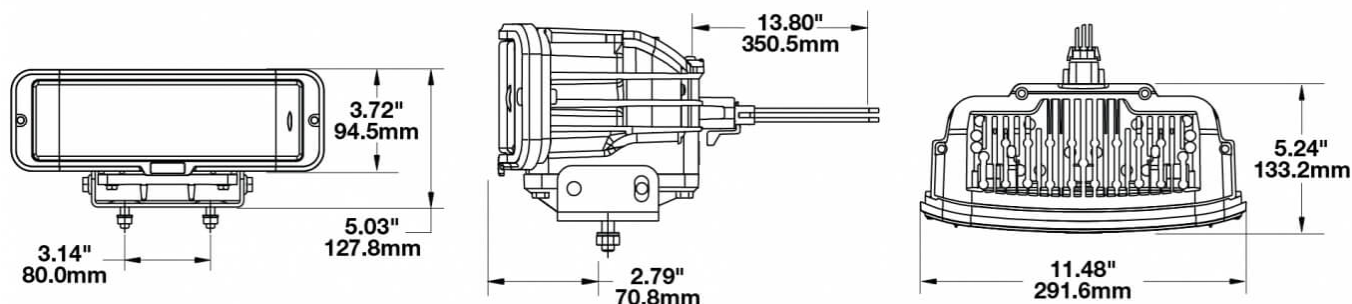

Mounting

Mounting type	Universal mount, M8-1.25x25 (2x)
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Delphi MP150-6M (12124107)
Mating connector	Delphi MP150-6F (12052848)
Reverse polarity protection	1
Black wire	Masse
Red wire	Standlicht
Yellow wire	Fahrtrichtungsanzeiger
White wire	Fernlicht
Blue wire	Tagfahrlicht
Orange wire	Abblendlicht

Part no. FS-1850-98341

Others

Material (Housing)	Xenoy
Material (Diffusing lens)	Polycarbonat
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Klar

Beam pattern

Variants

FS-1850-98341	12-24 V, Abblend- und Fernlicht, Tagfahr- und Standlicht, mit Fahrtrichtungsanzeiger, ECE-Straßenzulassung (Reg. 6, 7, 112), Set aus 2 Scheinwerfern (links und rechts), Linksverkehr
----------------------	---

Accessories

BRA-502-98391	Montagehalter-Set für Modell 9800, inkl. Schrauben, Muttern und Unterlegscheibe
----------------------	---