


Part no. FS-2334-90321




12-24 V, auxiliary headlight, offroad

Specifications

Voltage range (V), nominal	12-24
Voltage range (V), functional	9-30
Power consumption (W)	80.4-91.2
Load capacity	
Temperature range (°C)	
Brightness	
Brightness (raw lm)	12250
Brightness (effective lm)	2850
Brightness (cd)	240000
Brightness (lx)	
Brightness (reference index)	
Performance class	
Beam pattern/lens	Geländeausleuchtung
Beam angle [°]	
Colour Temperature (K)	
Others	
Ingress protection	IP67 & IP69K
Resistivity	
Standards	
Electromagnetic Compatibility	
Transient spike protection	150 V @ 1 Hz-100 pulses

Part no. FS-2334-90321

Dimensions

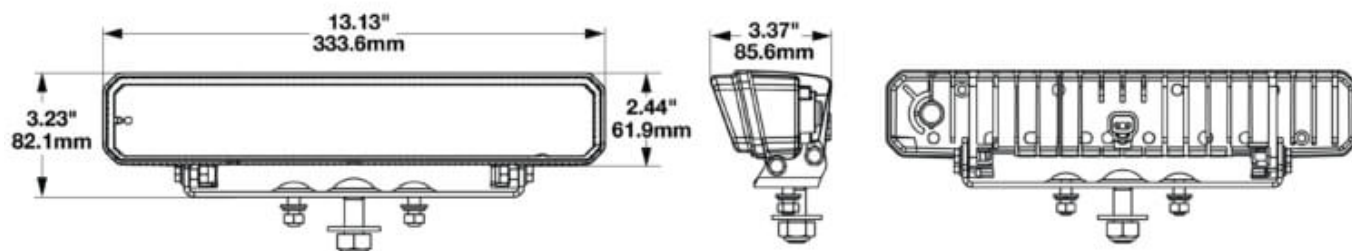

Mounting

Mounting type	Spec. mounting bracket
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Deutsch plug (DT04-2P)
Mating connector	Deutsch plug (DT06-2S)
Reverse polarity protection	1
Black wire	Masse
Red wire	Zusatzscheinwerfer

Part no. FS-2334-90321

Others

Material (Housing)	Aluminium
Material (Diffusing lens)	Polycarbonat
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Klar

Beam pattern

Variants

FS-2334-90321	12-24 V, Zusatz-Fernlicht, Offroad
----------------------	------------------------------------

Accessories

FS-1891-99350	Modell 9900 SmartHeat 12-24 V, Abblend- und Fernlicht, Tagfahrlicht, Standlicht, mit Fahrtrichtungsanzeiger, mit beheizter Frontscheibe, ECE-Straßenzulassung (Reg.6, 7, 87, 112), Set mit 2 Scheinwerfern
FS-2332-99321	Modell 9901 12-24 V, Zusatz-Fernlicht, ECE-Straßenzulassung
FS-2333-90321	Modell 9901 12-24 V, Zusatz-Fernlicht, mit beheizter Frontscheibe, ECE-Straßenzulassung