

Part no. PL-1267-21451




12-24 V, with DRL, white, ECE road approval
(Reg. 87)

Specifications

Voltage range (V), nominal	12-24
Voltage range (V), functional	
Power consumption (W)	6.6-7.2 (DRL), 0.6-0.72
Load capacity	
Temperature range (°C)	-40 to 65
Brightness	
Brightness (raw lm)	
Brightness (effective lm)	
Brightness (cd)	
Brightness (lx)	
Performance class	
Beam pattern/lens	Positionslicht
Beam angle [°]	
Colour Temperature (K)	5000
Others	
Ingress protection	IP67
Resistivity	

Part no. PL-1267-21451

Dimensions

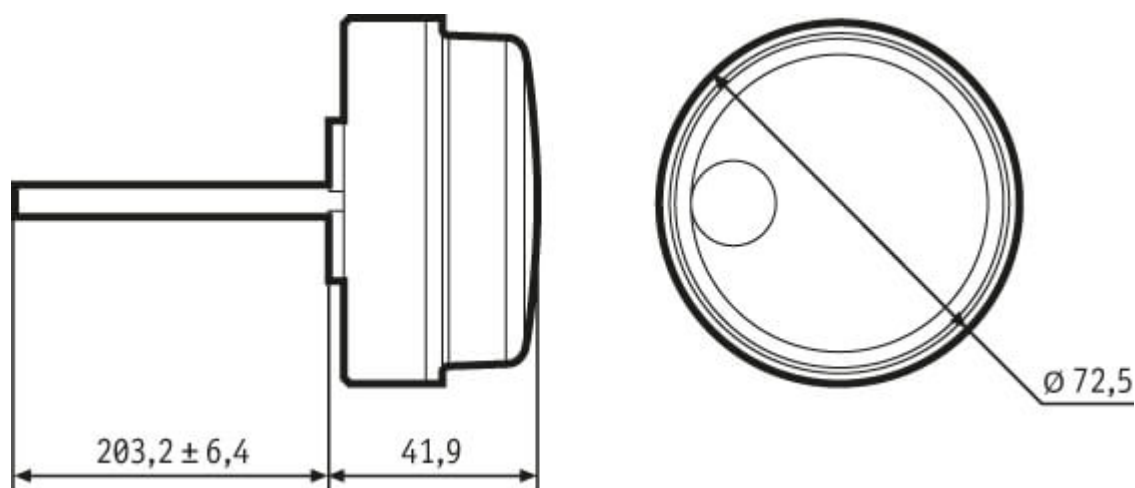

Mounting

Mounting type	Flat mount (with cable entry)
Installation dimensions/diameter [mm]	72,5
Installation depth [mm]	
Connector	Bare leads
Mating connector	
Reverse polarity protection	1
Black wire	Masse
Red wire	Standlicht
Green wire	Tagfahrlicht

Part no. PL-1267-21451

Others

Material (Housing)	Polycarbonat
Material (Diffusing lens)	Polycarbonat
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Weiß

Variants

PL-1267-21451	12-24 V, mit Tagfahrlicht, weiß, ECE-Straßenzulassung (Reg. 7, 87)
PL-2097-21451	12-24 V, mit Tagfahrlicht, weiß, ECE-Straßenzulassung (Reg. 7, 87), mit Montage-Adapter

Accessories