

Part no. PL-530-27212




12-24 V, stop light and tail light, red, ECE road approval (Reg. 7)

Specifications

Voltage range (V), nominal	12-24
Voltage range (V), functional	
Power consumption (W)	2,52
Load capacity	
Temperature range (°C)	-40 bis 65
Brightness	
Brightness (raw lm)	
Brightness (effective lm)	
Brightness (cd)	
Brightness (lx)	
Brightness (reference index)	
Performance class	
Beam pattern/lens	Schluss- und Bremslicht
Beam angle [°]	
Colour Temperature (K)	
Others	
Ingress protection	IP67
Resistivity	
Standards	ECE (Reg. 7), ASABE (279.14), SAE (J575, J585, J586, J1889, J2040, J2261), FMVSS (108)
Electromagnetic Compatibility	
Transient spike protection	

Dimensions

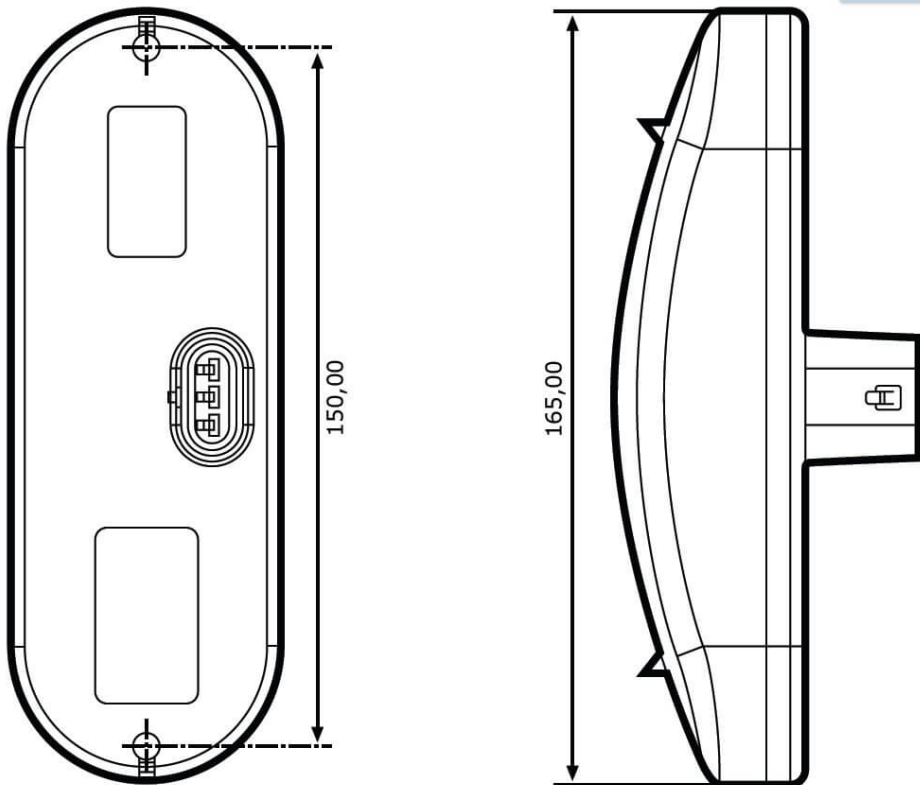

Mounting

Mounting type	Flachmontage (mit Steckerdurchführung)
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Delphi MP150-3M (12129615)
Mating connector	Delphi MP150-3F (12110293)
Reverse polarity protection	1
Socket	
Black wire	Masse
Red wire	Bremslicht
White wire	Schlusslicht

Part no. PL-530-27212

Others

Material (Housing)	Nylon
Material (Diffusing lens)	Polycarbonat
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Rot

Beam pattern

Variants

PL-530-27212	12-24 V, Stop- & Schlusslicht, rot, ECE-Straßenzulassung (Reg. 7)
--------------	---

Accessories