

Part no. RW-220-3488

12-48 V, 80 dB, dual mode




Specifications

Voltage range (V), nominal	12-48
Voltage range (V), functional	
Power consumption (W)	
Load capacity	
Temperature range (°C)	
Brightness	
Brightness (raw lm)	
Brightness (effective lm)	
Brightness (cd)	
Brightness (lx)	
Performance class	
Beam pattern/lens	
Beam angle [°]	
Colour Temperature (K)	
Others	
Ingress protection	
Resistivity	

Part no. RW-220-34880

Dimensions

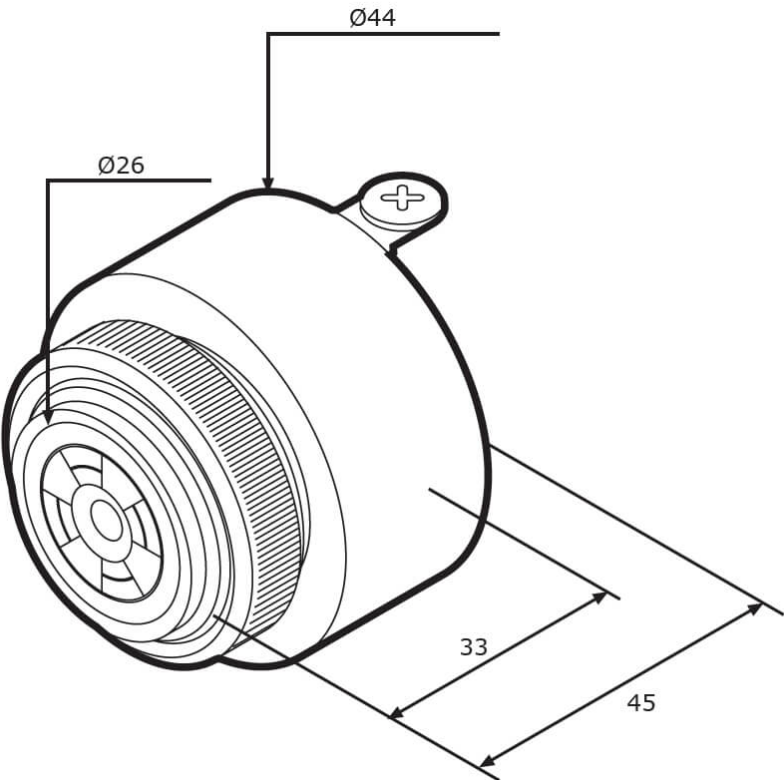

Mounting

Mounting type	
Installation dimensions/diameter [mm]	32
Installation depth [mm]	
Connector	Plug contacts
Mating connector	
Reverse polarity protection	0

Part no. **RW-220-34880**

Others

Material (Housing)	
Material (Diffusing lens)	
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	

Variants

RW-220-34880	12-48 V, 80 dB, Dual-Modus
RW-839-01120	12-48 V, 80 dB, schnelle Taktung
RW-842-09120	12-48 V, 80 dB, mittlerer Dauerton

Accessories