




Part no. SL-663-00603

IP54, key code M603

Specifications

Voltage range (V), nominal	
Voltage range (V), functional	
Power consumption (W)	
Load capacity	
Temperature range (°C)	
Brightness	
Brightness (raw lm)	
Brightness (effective lm)	
Brightness (cd)	
Brightness (lx)	
Performance class	
Beam pattern/lens	
Beam angle [°]	
Colour Temperature (K)	
Others	
Ingress protection	
Resistivity	

Dimensions

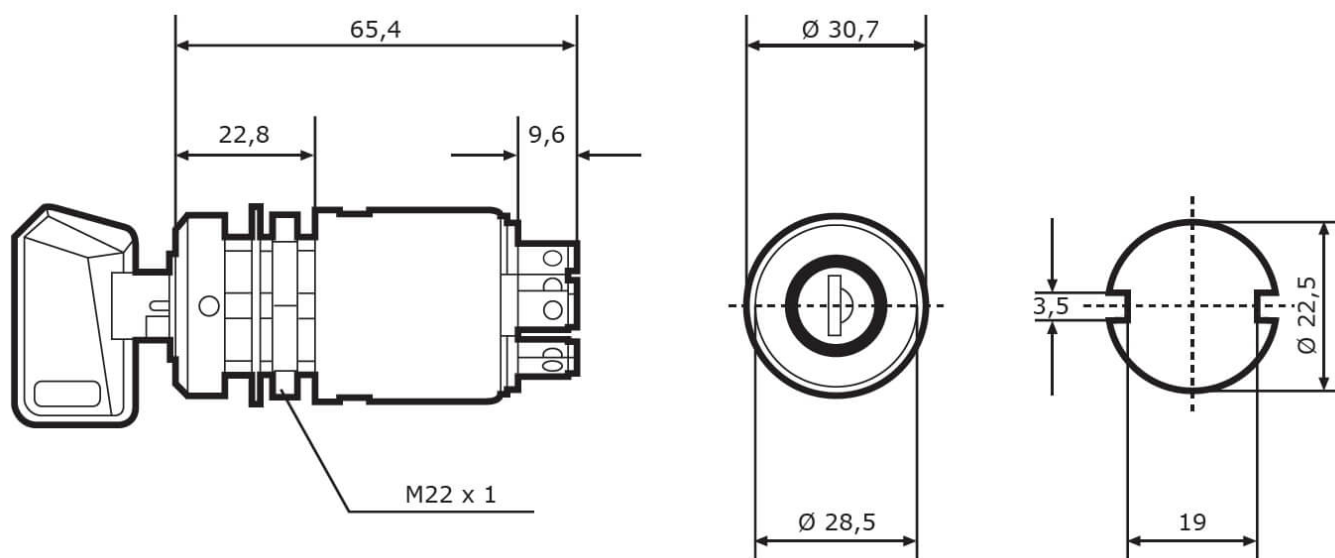

Mounting

Mounting type	
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	
Mating connector	
Reverse polarity protection	0

Part no. SL-663-00603

Others

Material (Housing)	
Material (Diffusing lens)	
Color (Housing)	
Color (Mount)	
Color (Diffusing lens)	

Variants

SL-663-00620	IP54, Schließung M620
SL-663-00621	IP54, Schließung M621
SL-663-00622	IP54, Schließung M622
SL-663-00623	IP54, Schließung M623
SL-663-00624	IP54, Schließung M624
SL-663-00625	IP54, Schließung M625
SL-663-00626	IP54, Schließung M626
SL-663-00627	IP54, Schließung M627
SL-663-00628	IP54, Schließung M628
SL-663-00629	IP54, Schließung M629
SL-663-00630	IP54, Schließung M630
SL-663-00631	IP54, Schließung M631
SL-663-00632	IP54, Schließung M632
SL-663-00633	IP54, Schließung M633
SL-663-00634	IP54, Schließung M634
SL-663-00635	IP54, Schließung M635
SL-663-00636	IP54, Schließung M636
SL-663-00637	IP54, Schließung M637
SL-663-00638	IP54, Schließung M638
SL-663-00639	IP54, Schließung M639
SL-663-00603	IP54, Schließung M603

Accessories