

Part no. **SS-079-3202**




key code M516, IP65

Specifications

Voltage range (V), nominal	12-24
Voltage range (V), functional	
Load capacity	20-10
Temperature range (°C)	-40 to 90
Working life	>100,000 work cycles
Key code	M516
Positions	Stop-OFF-ON-Preheat-Start
Key removable	AUS-Position
Others	
Ingress protection	IP65 (key side)
Resistivity	
Standards	
Electromagnetic Compatibility	
Transient spike protection	

Dimensions

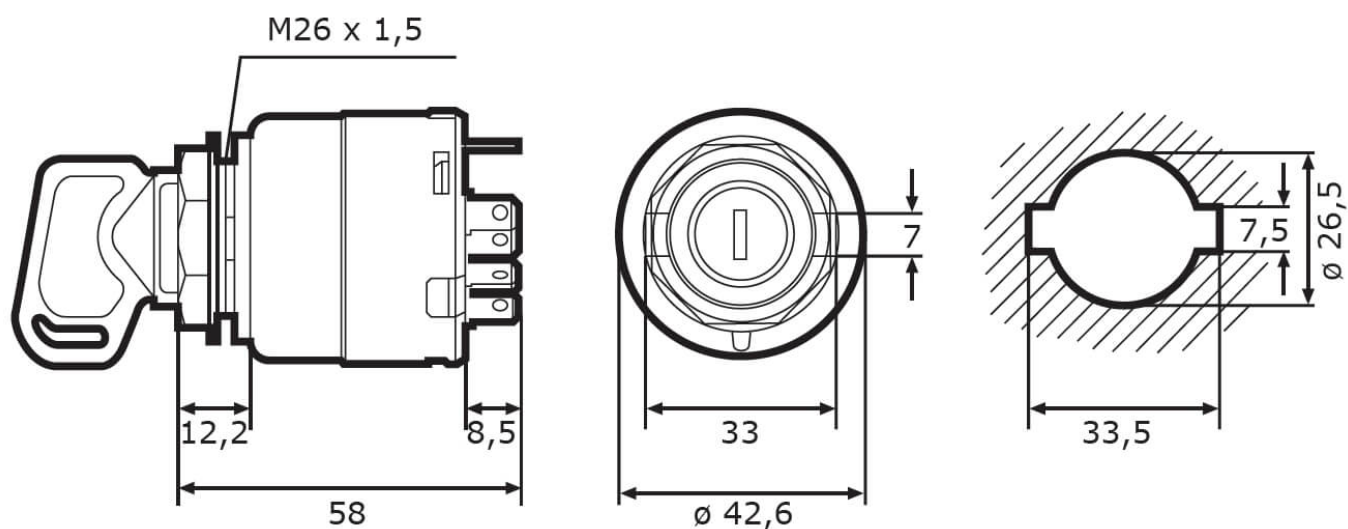

Mounting

Mounting type	Built-in
Installation dimensions/diameter [mm]	23,5 / 42,6
Installation depth [mm]	48,45
Connector	Plug contacts
Mating connector	

Part no. **SS-079-32020**

Others

Material (Housing)	
Color (Housing)	

Variants

SS-079-32020	Schließung M516, IP65
--------------	-----------------------

Accessories