

Zündstartschaltenschloss 475020 Heavy Duty

Part no. SS-1063-7502



key code M516, IP65, with re-start inhibit, IP65


Specifications

Voltage range (V), nominal	12-24
Voltage range (V), functional	
Load capacity	
Temperature range (°C)	-40 to 90
Working life	>50,000 / <100,000 work cycles (electr./mechan.)
Key code	M516
Positions	OFF-ON-Start
Key removable	AUS-Position
Others	
Ingress protection	IP65 (key side)
Resistivity	
Standards	
Electromagnetic Compatibility	
Transient spike protection	

Zündstartschaltenschloss 475020 Heavy Duty

Part no. SS-1063-75020

Dimensions

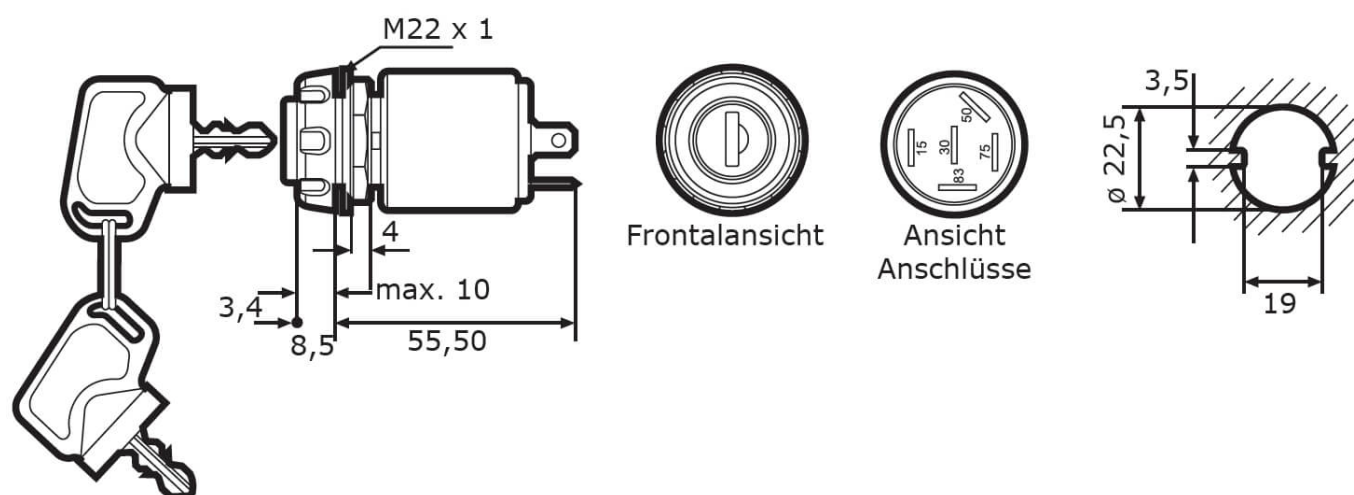

Mounting

Mounting type	Built-in
Installation dimensions/diameter [mm]	22,5
Installation depth [mm]	55,5
Connector	Plug contacts
Mating connector	

Zündstartschaltschloss 475020 Heavy Duty

Part no. SS-1063-75020

Others

Material (Housing)

Color (Housing)

Variants

SS-1063-75020

Schließung M516, IP65, mit Anlasswiederhol Sperre, IP65

Accessories