

Part no. SS-426-47552




key code M516, with re-start inhibit, IP65

Specifications

Voltage range (V), nominal	12-24
Voltage range (V), functional	
Load capacity	
Temperature range (°C)	
Working life	
Key code	M516
Positions	OFF-ON-Start
Key removable	AUS-Position
Others	
Ingress protection	
Resistivity	
Standards	
Electromagnetic Compatibility	
Transient spike protection	

Part no. SS-426-47552

Dimensions

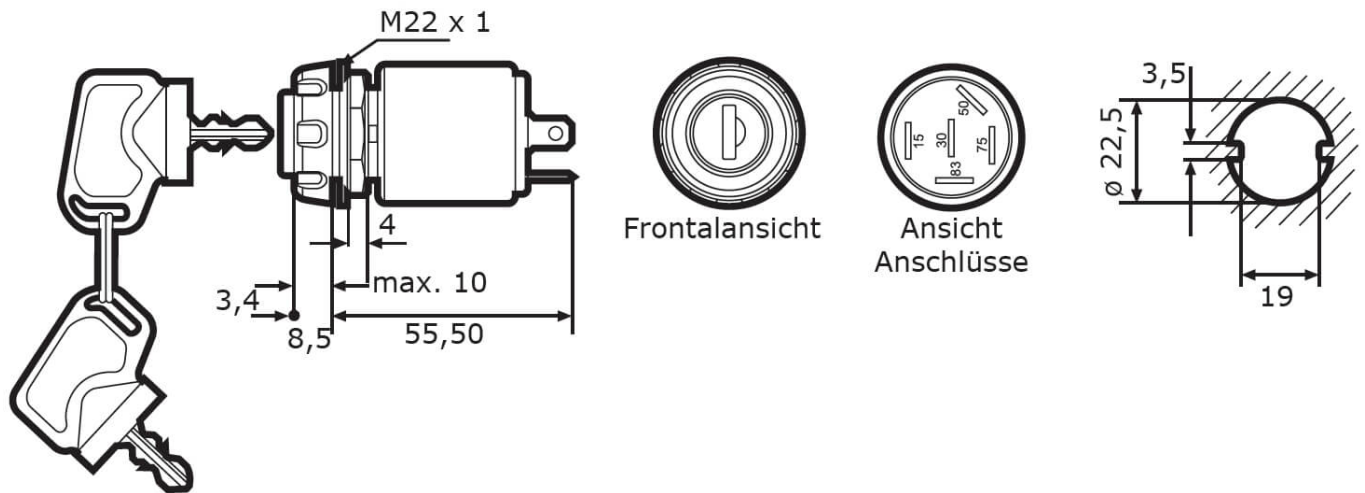

Mounting

Mounting type	Built-in
Installation dimensions/diameter [mm]	22,5
Installation depth [mm]	55,5
Connector	Plug contacts
Mating connector	

Part no. **SS-426-47552**

Others

Material (Housing)	
Color (Housing)	

Variants

SS-426-47552	Schließung M516, mit Anlasswiederhol Sperre, IP65
--------------	---

Accessories