

Part no. TL-2323-26411




12-24 V, stop and tail light, ECE road approval,
flange mount, red lens

Specifications

Voltage range (V), nominal	12-24
Voltage range (V), functional	9-30
Power consumption (W)	5.52 (stop), 0.55 (tail)
Load capacity	
Temperature range (°C)	-40 to 65
Brightness	
Brightness (raw lm)	
Brightness (effective lm)	
Brightness (cd)	
Brightness (lx)	
Performance class	
Beam pattern/lens	
Beam angle [°]	
Colour Temperature (K)	
Others	
Ingress protection	IP67 & IP69K
Resistivity	

Part no. TL-2323-26411

Dimensions

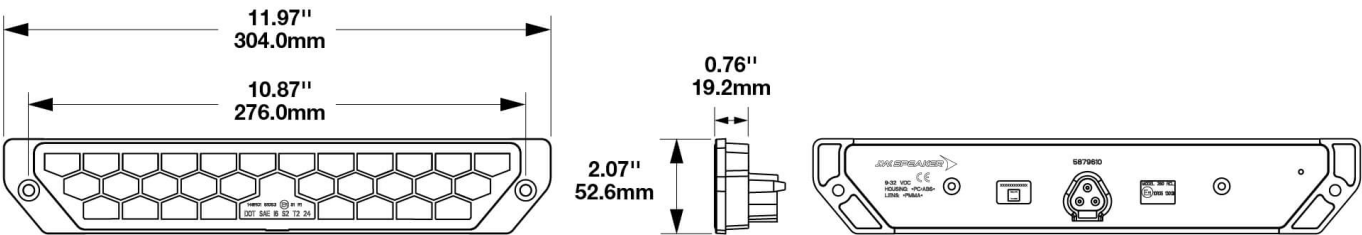

Mounting

Mounting type	
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	
Mating connector	Deutsch DT06-3S
Reverse polarity protection	1

Part no. TL-2323-26411

Others

Material (Housing)	Polycarbonat + ABS-Kunststoff
Material (Diffusing lens)	PMMA
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Rot

Variants

TL-2323-26411	12-24 V, Brems- und Schlussleuchte, ECE-Straßenzulassung, Flansch-Montage, rote Streuscheibe
TL-2324-26411	12-24 V, Brems- und Schlussleuchte, ECE-Straßenzulassung, Zapfen-Montage, rote Streuscheibe
TL-2327-26411	12-24 V, Brems- und Schlusslicht, Fahrtrichtungsanzeiger, Nebelschlussleuchte, Rückfahrscheinwerfer, ECE-Straßenzulassung, Flansch-Montage
TL-2328-26411	12-24 V, Brems- und Schlusslicht, Fahrtrichtungsanzeiger, Nebelschlussleuchte, Rückfahrscheinwerfer, ECE-Straßenzulassung, Zapfen-Montage
TL-2329-26431	12-24 V, Rückfahrscheinwerfer, ECE-Straßenzulassung, Flansch-Montage
TL-2330-26431	12-24 V, Rückfahrscheinwerfer, ECE-Straßenzulassung, Zapfen-Montage

Accessories