


Part no. WL-2021-79551

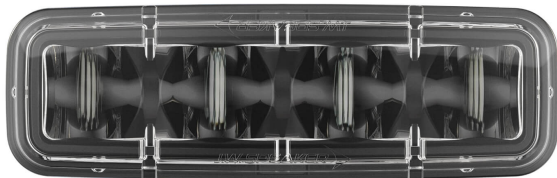


12-36 V, blue line

Specifications

Voltage range (V), nominal	12-36
Voltage range (V), functional	10-45
Power consumption (W)	12,0-16,2
Load capacity	
Temperature range (°C)	-40 bis 65
Brightness	
Brightness (raw lm)	496
Brightness (effective lm)	110
Brightness (cd)	1200
Brightness (lx)	
Performance class	
Beam pattern/lens	
Beam angle [°]	
Colour Temperature (K)	
Others	
Ingress protection	IP69K
Resistivity	

Part no. WL-2021-79551

Dimensions

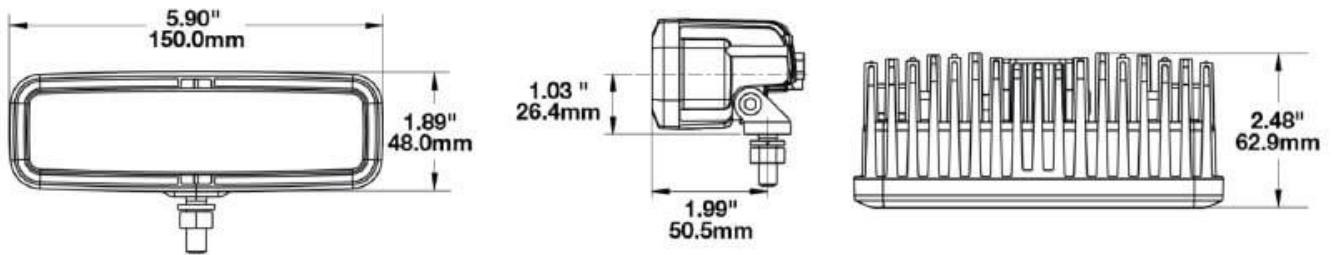

Mounting

Mounting type	Spez. Montagehalter
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Deutsch-Stecker (DT04-2P)
Mating connector	Deutsch-Stecker (DT06-2S)
Reverse polarity protection	1
Black wire	Masse
Red wire	Warnleuchte

Others

Material (Housing)	Aluminium
Material (Diffusing lens)	Polycarbonat
Color (Housing)	Schwarz
Color (Mount)	Schwarz
Color (Diffusing lens)	Klar

Variants

WL-2020-79551	12-36 V, rote Linie
WL-2021-79551	12-36 V, blaue Linie
WL-2022-79551	12-36 V, orange Linie
WL-2023-79551	48-110 V, rote Linie
WL-2024-79551	48-110 V, blaue Linie
WL-2025-79551	48-110 V, orange Linie

Accessories

BRA-378-49244	Montagehalter 793 für Modell 793, lang
BRA-473-79300	Montagehalter-Set kurz 793 für Modell 791/793, rostfreier Stahl