

**Part no. WL-2098-60551**




12-24 V, multicolour light (red, amber, green, blue)

## Specifications

|  |                         |
|--|-------------------------|
| <b>Voltage range (V), nominal</b>            | 12-24                   |
| <b>Voltage range (V), functional</b>         | 9-16                    |
| <b>Power consumption (W)</b>                 |                         |
| <b>Load capacity</b>                         |                         |
| <b>Temperature range (°C)</b>                | -40 to 65               |
| <b>Brightness</b>                            |                         |
| <b>Brightness (raw lm)</b>                   |                         |
| <b>Brightness (effective lm)</b>             |                         |
| <b>Brightness (cd)</b>                       |                         |
| <b>Brightness (lx)</b>                       |                         |
| <b>Performance class</b>                     |                         |
| <b>Beam pattern/lens</b>                     |                         |
| <b>Beam angle [°]</b>                        |                         |
| <b>Colour Temperature (K)</b>                |                         |
| <b>Frequency, revolutions (Hz, rpm, fpm)</b> |                         |
| <b>Others</b>                                |                         |
| <b>Ingress protection</b>                    | IP69K                   |
| <b>Resistivity</b>                           |                         |
| <b>Standards</b>                             |                         |
| <b>Electromagnetic Compatibility</b>         |                         |
| <b>Transient spike protection</b>            | 330 V @ 1 Hz-100 pulses |

Part no. WL-2098-60551

## Dimensions

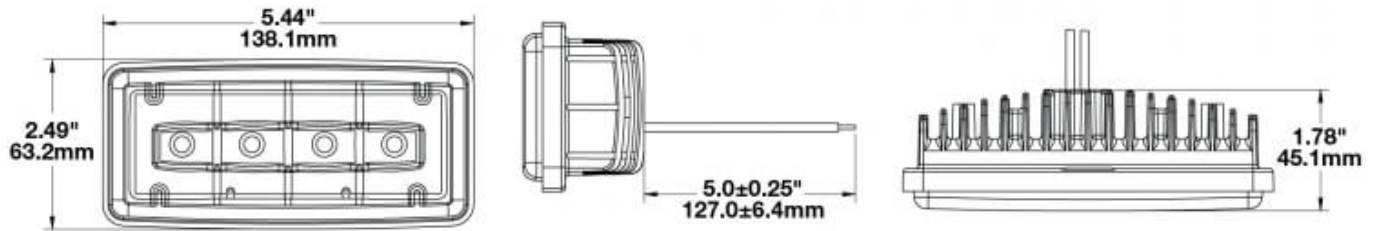

## Mounting

|                                       |                 |
|---------------------------------------|-----------------|
| Mounting type                         | Universal mount |
| Installation dimensions/diameter [mm] |                 |
| Installation depth [mm]               |                 |
| Connector                             |                 |
| Mating connector                      |                 |
| Reverse polarity protection           | 1               |
| Socket                                |                 |
| Black wire                            | Masse           |
| Red wire                              | Rot             |
| Yellow wire                           | Orange          |
| Green wire                            | Grün            |
| Blue wire                             | Blau            |

**Part no. WL-2098-60551**

## Others

|                           |              |
|---------------------------|--------------|
| Material (Housing)        | Aluminium    |
| Material (Diffusing lens) | Polycarbonat |
| Color (Housing)           | Schwarz      |
| Color (Mount)             |              |
| Color (Diffusing lens)    | Weiß         |

## Beam pattern

## Variants

|                      |   |
|----------------------|---|
| <b>WL-2098-60551</b> | 12-24 V, Mehrfarben-Leuchte (Rot, Orange, Grün, Blau) |
|----------------------|---|

## Accessories