


Part no. WL-2101-77551


12-72 V, blue arc

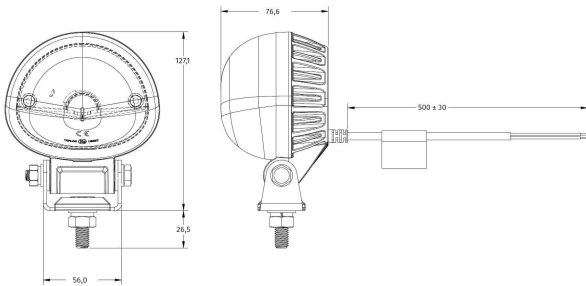

Specifications

Voltage range (V), nominal	12-72
Voltage range (V), functional	10-80
Power consumption (W)	12,24-13,08
Load capacity	
Temperature range (°C)	-40 bis 65
Brightness	
Brightness (raw lm)	
Brightness (effective lm)	
Brightness (cd)	
Brightness (lx)	
Performance class	
Beam pattern/lens	
Beam angle [°]	
Colour Temperature (K)	
Others	
Ingress protection	IP67 / IP69K
Resistivity	

Dimensions

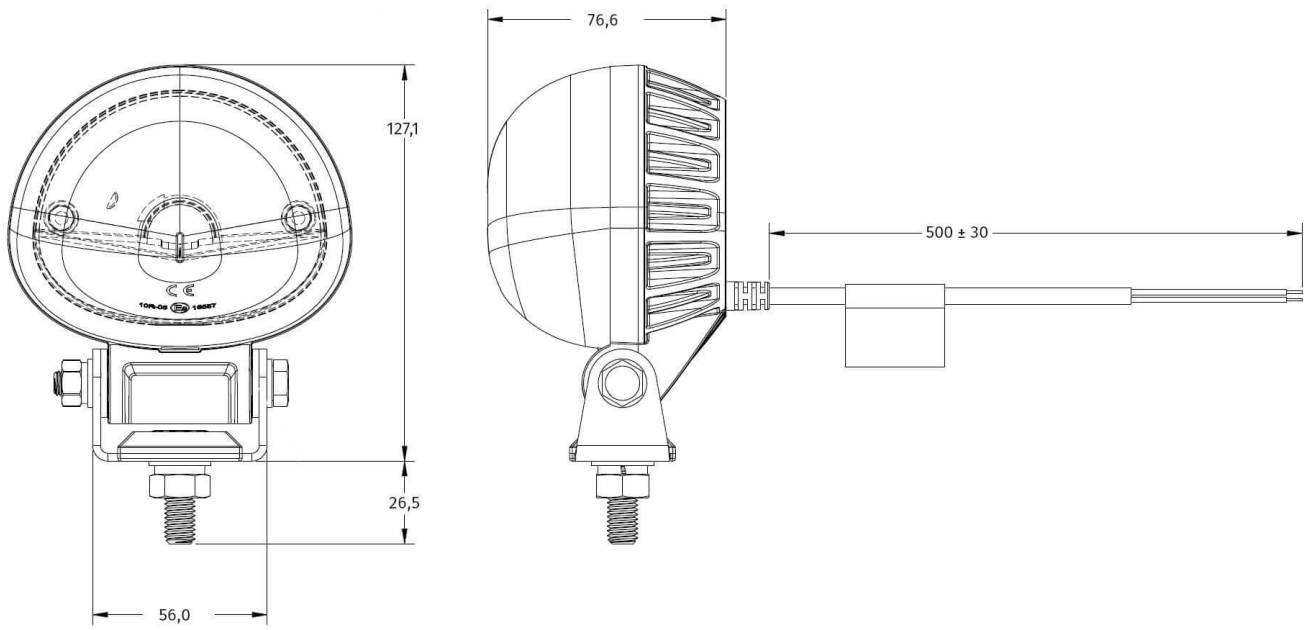

Mounting

Mounting type	Universalhalterung, M10
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	
Mating connector	
Reverse polarity protection	1

Part no. WL-2101-77551

Others

Material (Housing)	
Material (Diffusing lens)	
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Klar

Variants

WL-2100-77551	12-72 V, roter Bogen
WL-2101-77551	12-72 V, blauer Bogen
WL-2102-77551	12-72 V, grüner Bogen

Accessories