

Part no. WL-2443-77551




12-48 V, blue, AMP plug

Specifications

Voltage range (V), nominal	12-48
Voltage range (V), functional	9-60
Power consumption (W)	2.76-3.21
Load capacity	
Temperature range (°C)	-40 to 65
Brightness	
Brightness (raw lm)	
Brightness (effective lm)	
Brightness (cd)	
Brightness (lx)	
Performance class	
Beam pattern/lens	
Beam angle [°]	
Colour Temperature (K)	
Others	
Ingress protection	IP67 & IP69K
Resistivity	

Part no. WL-2443-77551

Dimensions

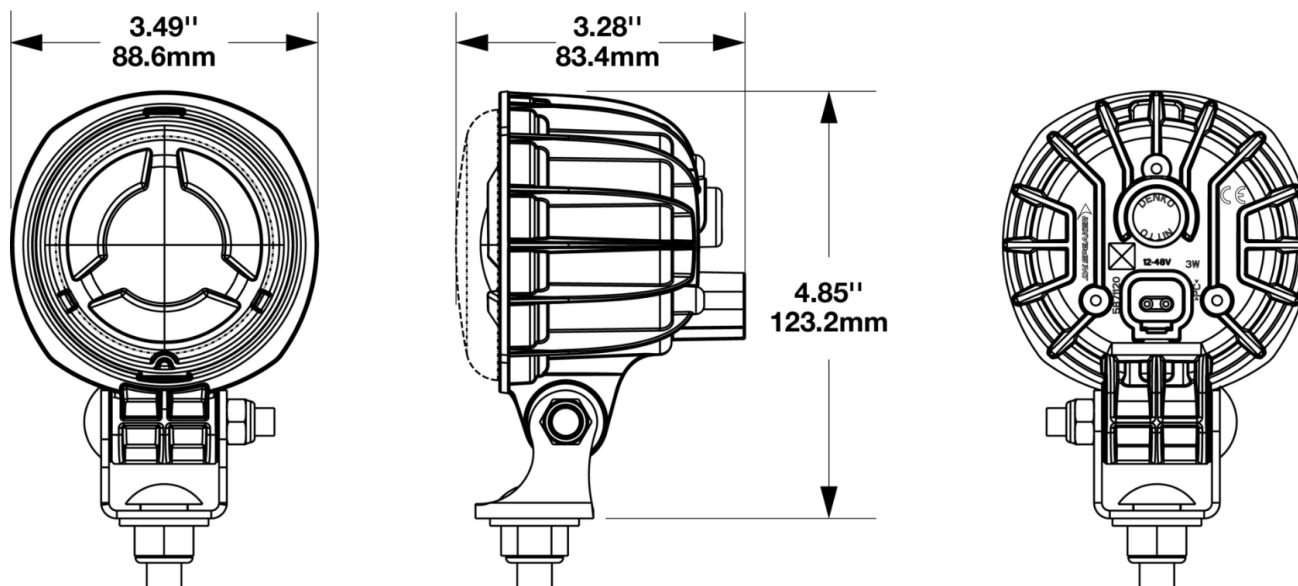

Mounting

Mounting type

Universal mount, M10

Installation dimensions/diameter [mm]

Installation depth [mm]

Connector

AMP, integrated

Mating connector

AMP #180923

Reverse polarity protection

1

Part no. WL-2443-77551

Others

Material (Housing)	Polycarbonat
Material (Diffusing lens)	Polycarbonat
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Klar

Variants

WL-2441-77551	12-48 V, blau, Deutsch-Stecker
WL-2442-77551	12-48 V, blau, Deusch-Stecker, Bulk ohne Anschlusskabel
WL-2443-77551	12-48 V, blau, AMP-Stecker
WL-2444-77551	12-48 V, blau, AMP-Stecker, Bulk ohne Anschlusskabel
WL-2445-77551	12-48 V, rot, Deutsch-Stecker
WL-2446-77551	12-48 V, rot, Deutsch-Stecker, Bulk ohne Anschlusskabel
WL-2447-77551	12-48 V, rot, AMP-Stecker
WL-2448-77551	12-48 V, rot, AMP-Stecker, Bulk ohne Anschlusskabel

Accessories