

LED-Fahrscheinwerfer Modell 9800 SmartHeat

Part no. FS-1578-98343



12 V, low and high beam, with DRL and front position, with turn signal, ECE road approval (Reg. 6, 7, 87, 112), with heated lens, 2 light kit (left and right), RHT


Specifications

Voltage range (V), nominal	12
Voltage range (V), functional	10-15
Power consumption (W)	32.4 (low), 40.8 (high), 0.48 (DRL), 10.2 (turn)
Load capacity	
Temperature range (°C)	
Brightness	
Brightness (raw lm)	2160 (Abblendl.), 2880 (Fernl.)
Brightness (effective lm)	785 (Abblendl.), 1150 (Fernl.)
Brightness (cd)	
Brightness (lx)	
Performance class	
Beam pattern/lens	Abblend- und Fernlicht, Tagfahrlicht, Fahrtrichtungsanzeiger
Beam angle [°]	
Colour Temperature (K)	5000
Others	
Ingress protection	
Resistivity	

LED-Fahrscheinwerfer Modell 9800 SmartHeat

Part no. FS-1578-98343

Dimensions

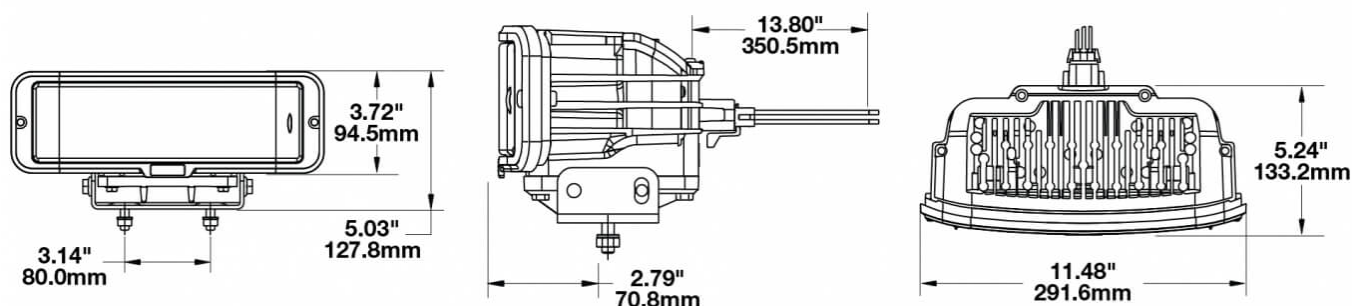

Mounting

Mounting type	Universal mount, M8-1.25x25 (2x)
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Delphi MP150-6M (12124107)
Mating connector	Delphi MP150-6F (12052848)
Reverse polarity protection	1
Black wire	Masse
Red wire	Standlicht
Yellow wire	Fahrtrichtungsanzeiger
White wire	Fernlicht
Blue wire	Tagfahrlicht
Orange wire	Abblendlicht

LED-Fahrscheinwerfer Modell 9800 SmartHeat

Part no. FS-1578-98343

Others

Material (Housing)	Xenoy
Material (Diffusing lens)	Polycarbonat
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Klar

Variants

FS-1578-98343	12 V, Abblend- und Fernlicht, mit Tagfahrlicht und Standlicht, mit Fahrtrichtungsanzeiger, ECE-Straßenzulassung (Reg. 6, 7, 87, 112), mit beheizter Frontlinse, Set aus 2 Scheinwerfern (links und rechts), Rechtsverkehr
FS-1702-98344	24 V, Abblend- und Fernlicht, mit Tagfahrlicht und Standlicht, mit Fahrtrichtungsanzeiger, ECE-Straßenzulassung (Reg. 6, 7, 87, 112), mit beheizter Frontlinse, Set aus 2 Scheinwerfern (links und rechts), Rechtsverkehr

Accessories

BRA-502-98391	Montagehalter-Set für Modell 9800, inkl. Schrauben, Muttern und Unterlegscheibe
----------------------	---